

## Push Pull RJ45 with cable, Profinet

PUR 2x2xAWG22 shielded gn UL/CSA 1,5m

Push Pull, RJ45


Male straight

4-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


### [Link to Product](#)

#### Illustration

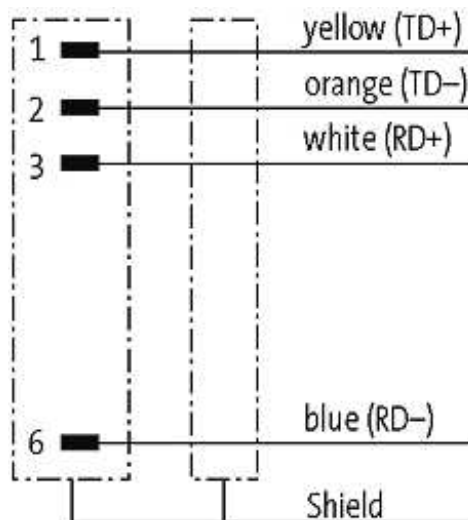

Male

6 321

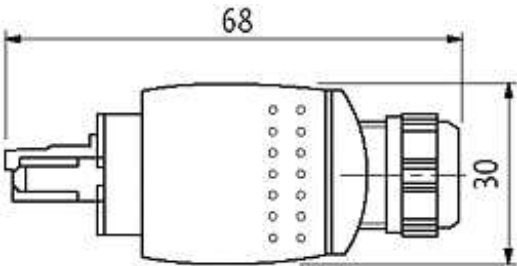

Height: 22 mm

Product may differ from Image

More Info



Form

Form 99631

Cables

Cable number	794
No./diameter of wires	2 × 2 × AWG22
Wire isolation	PE (wh, ye, bl, or)
Jacket Color	green
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 6.6 mm
Bend radius (fixed)	8 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+60 °C

Shielded	yes
----------	-----

**General data**

Temperature range	-40...+70 °C, depending on cable quality
-------------------	--

**Technical Data**

Operating voltage	max. 60 V DC
-------------------	--------------

Operating current per contact (20 °C)	max. 1.75 A
---------------------------------------	-------------

Locking of ports	Push Pull
------------------	-----------

Protection	IP67 inserted and tightened (EN 60529)
------------	--

**Commercial data**

country of origin	DE
-------------------	----

customs tariff number	85444290
-----------------------	----------

minimum order quantity	1
------------------------	---