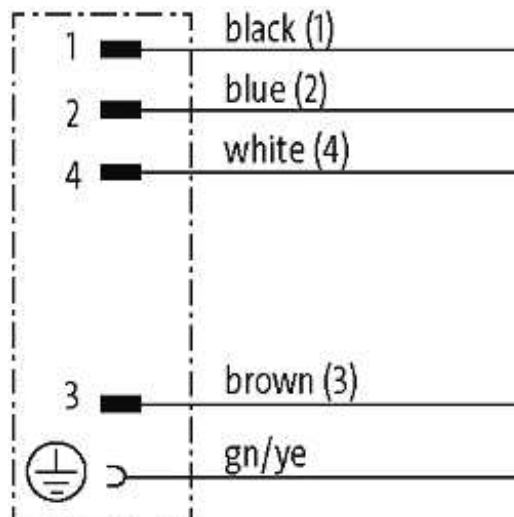


M12 Power L-coded male receptacle front mount



wires PUR 5x1.5 0,2m

M12, L-coded
Flange Connectors
Male straight
5-pole

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request. Further cable lengths on request.


[Link to Product](#)**Illustration**

Male

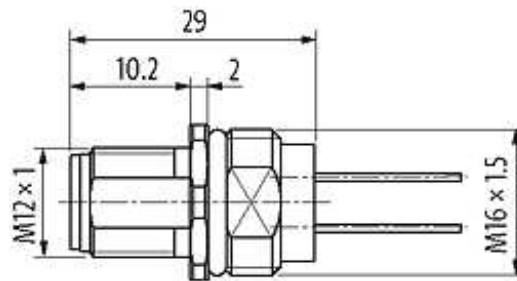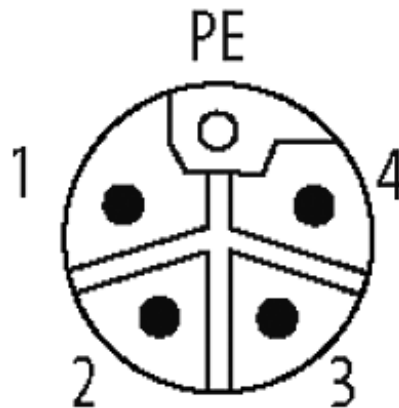

Product may differ from Image

Approvals



Form

Form P4281

Cables

Cable number	980
No./diameter of wires	5 × 1.5 mm ²
Wire isolation	PP (br, wh, bl, bk, gnye)
Shore hardness outer jacket	60 ± 5D
Bend radius (fixed)	7.5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-20...+80 °C

Technical Data

Operating voltage	max. 63 V AC/DC
Operating current per contact	max. 16 A
Coding	M12, L-coded

Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Compression gland	M12 (SW17)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Zinc die casting, matte nickel plated

Commercial data

customs tariff number	85444290
minimum order quantity	1