

M23 FEMALE 0° 17POLE

PUR (3x(2x0,14D)+2x0,5+4x0.14+4x0,22)C 8m

Signal cable for SINAMICS S120 and motors with connection M23
With open ended wires



Further cable lengths on request. The resistance to aggressive media should be individually tested for your application. Further details on request. Plastic housings with good resistance against chemicals and oils.

[Link to Product](#)

Illustration



Female

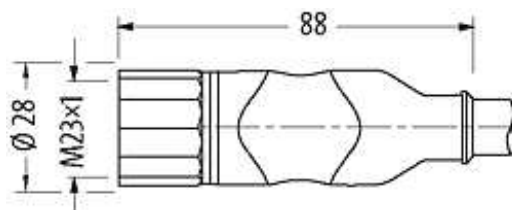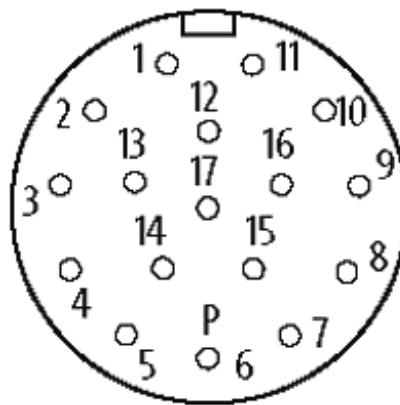

Product may differ from Image

Form

Form SS501

Cables

Cable number 811

stay connected

No./diameter of wires	3×(2×0.14)-C + 4×0.22 + 4×0.14 + 2×0.5-C
C-track properties	10 Mio.
Jacket Color	green
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 9.5 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+60 °C
Shielded	yes

General data

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

Technical Data

Operating voltage	30 V AC/DC
Locking of ports	Screw thread M23 × 1 mm (recommended torque 2.0 Nm) self-securing
Compression gland	M23 (SW27)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	CuZn, nickel plated
Material	PUR

Commercial data

customs tariff number	85444290
minimum order quantity	1