

M23 FEMALE 0° 17POLE

PUR (3x(2x0,14D)+2x0,5+4x0.14+4x0,22)C 3m

Signal cable for SINAMICS S120 and motors with connection M23



Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration



Female

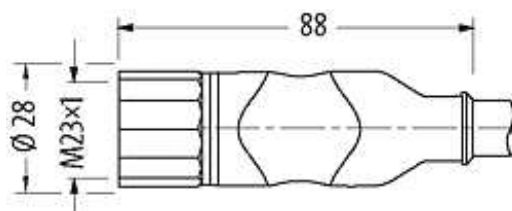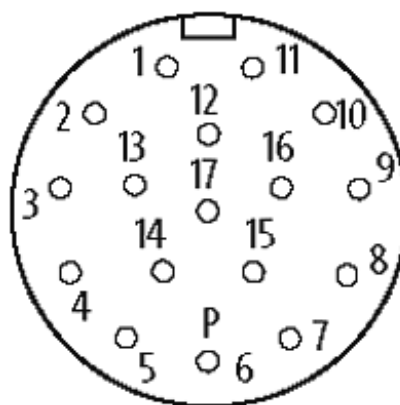

Product may differ from Image

Form

Form SS521

Cables

Cable number 811

No./diameter of wires 3x(2x0.14)-C + 4x0.22 + 4x0.14 + 2x0.5-C

| | |
|-----------------------------|----------------|
| C-track properties | 10 Mio. |
| Jacket Color | green |
| Shore hardness outer jacket | 90 ± 5A |
| Material (jacket) | PUR (UL/CSA) |
| Outer Ø | approx. 9.5 mm |
| Bend radius (fixed) | 10 × outer Ø |
| Bend radius (moving) | 12 × outer Ø |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -25...+60 °C |
| Shielded | yes |

General data

| | |
|-------------------|--|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|--|

Technical Data

| | |
|-------------------|---|
| Operating voltage | 30 V AC/DC |
| Locking of ports | Screw thread M23 × 1 mm (recommended torque 2.0 Nm) self-securing |
| Protection | IP67 |

Commercial data

| | |
|------------------------|----------|
| customs tariff number | 85444290 |
| minimum order quantity | 1 |