

## M23 FEMALE 0° 17POLE

PUR (3x(2x0,14D)+2x0,5+4x0.14+4x0,22)C 6m

Signal cable for SINAMICS S120 and motors with connection M23



Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration



Female

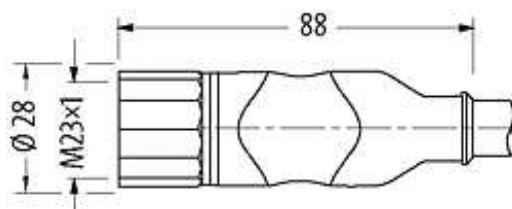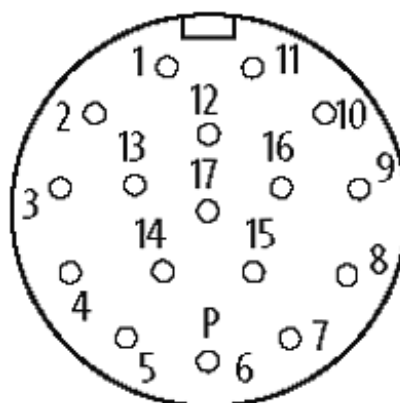

Product may differ from Image

#### Form

Form SS521

#### Cables

Cable number 811

No./diameter of wires 3x(2x0.14)-C + 4x0.22 + 4x0.14 + 2x0.5-C

C-track properties	10 Mio.
Jacket Color	green
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 9.5 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+60 °C
Shielded	yes

#### General data

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

#### Technical Data

Operating voltage	30 V AC/DC
Locking of ports	Screw thread M23 × 1 mm (recommended torque 2.0 Nm) self-securing
Protection	IP67

#### Commercial data

customs tariff number	85444290
minimum order quantity	1