

**"M12 male 0° with cable Lite**


PUR-OB 4x0,34 black UL,CSA+drag chain 10m"


M12

Male straight

4-pole

7005 - plastic hexagonal screw (M12 Lite)

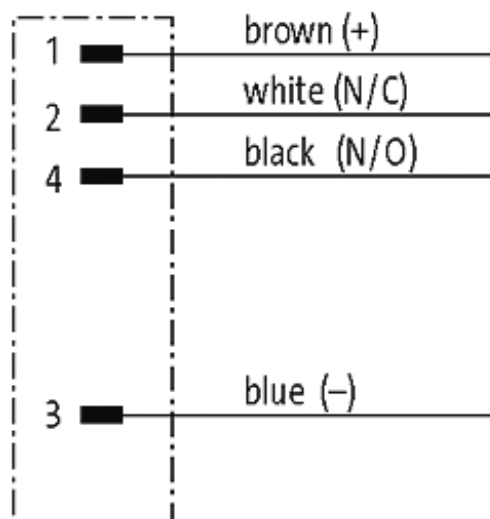[Link to Product](#)**Illustration****Male**

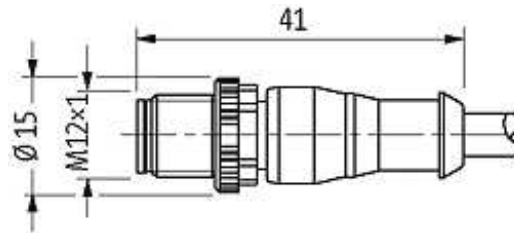

Product may differ from Image

### Approvals



\* only for products with UL/CSA approved cable

### Form

Form 12021

### Cables

Cable number	634
No./diameter of wires	4 × 0.34 mm <sup>2</sup>
Wire isolation	PP (br, wh, bl, bk)
C-track properties	5 Mio.
Torsion	2 Mio. ± 180°/m
Jacket Color	black
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 4.7 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+80 °C

### Technical Data

Operating voltage	max. 250 V AC/DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)
Locking material	Polyamide

### Commercial data

country of origin DE

customs tariff number	85444290
minimum order quantity	1

---