

M12 female 0° with cable F<(>&<)>B

PUR 8x0,25 gy drag chain 10m


F&B

Female straight

8-pole


Profile gasket

Further cable lengths on request.

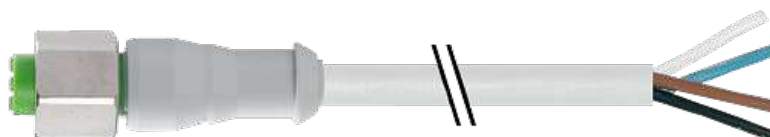[Link to Product](#)**Illustration**

1	⤵	white
2	⤵	brown
3	⤵	green
4	⤵	yellow
5	⤵	gray
6	⤵	pink
7	⤵	blue
8	⤵	red

Female

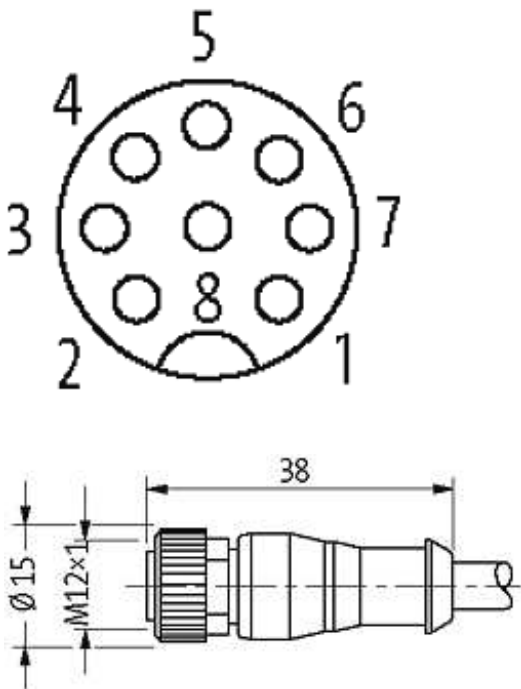

Product may differ from Image

Approvals



Form

Form 17041

Cables

Cable number	292
No./diameter of wires	8 × 0.25 mm²
Wire isolation	PP (wh, br, gn, ye, gr, pk, bl, rd)
C-track properties	2 Mio.
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR
Outer Ø	approx. 6.0 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+80 °C

General data

Temperature range -25...+85 °C, depending on cable quality

Technical Data

Operating voltage max. 30 V AC/DC

Operating current per contact max. 2 A

Locking of ports Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing

Protection IP65, IP66K, IP67, IP68 inserted and tightened (EN 60529)

Locking material Stainless Steel 1.4404 (V4A)

Commercial data

country of origin DE

customs tariff number 85444290

minimum order quantity 1