

M12 female 90° with cable F<(>&<)>B

PUR 8x0,25 gy drag chain 10m


F&B

Female 90°

8-pole


Profile gasket

Further cable lengths on request.

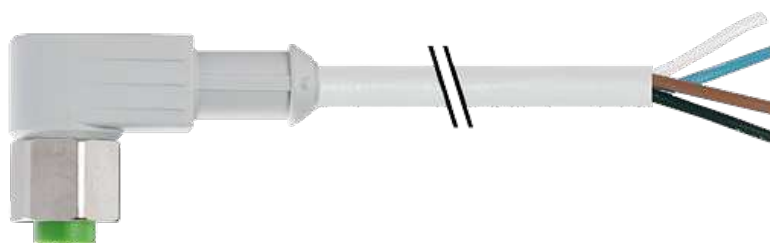[Link to Product](#)**Illustration**

1	⌋	white
2	⌋	brown
3	⌋	green
4	⌋	yellow
5	⌋	gray
6	⌋	pink
7	⌋	blue
8	⌋	red

Female

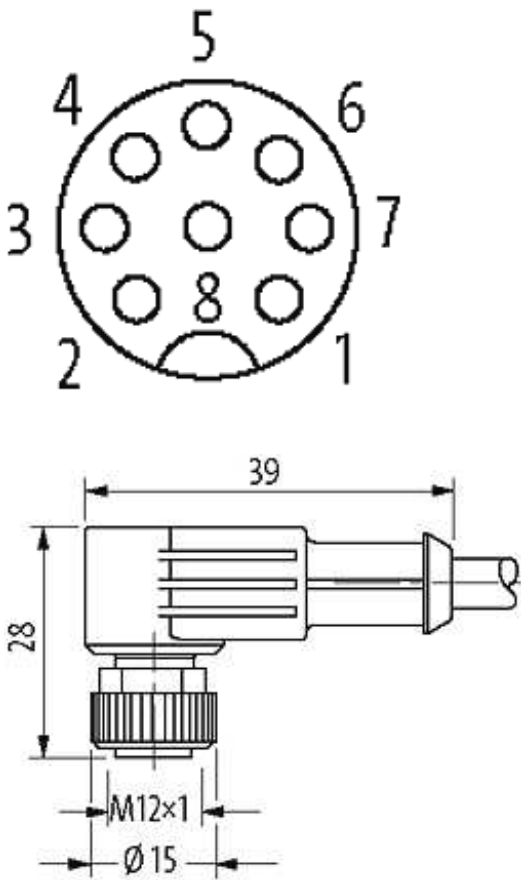

Product may differ from Image

Approvals



Form

Form 17061

Cables

Cable number	292
No./diameter of wires	8 × 0.25 mm²
Wire isolation	PP (wh, br, gn, ye, gr, pk, bl, rd)
C-track properties	2 Mio.
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR
Outer Ø	approx. 6.0 mm
Bend radius (fixed)	10 × outer Ø

Bend radius (moving)	15 × outer Ø
----------------------	--------------

Temperature range (fixed)	-40...+80 °C
---------------------------	--------------

Temperature range (mobile)	-20...+80 °C
----------------------------	--------------

General data

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

Technical Data

Operating voltage	max. 30 V AC/DC
-------------------	-----------------

Operating current per contact	max. 2 A
-------------------------------	----------

Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
------------------	---

Protection	IP65, IP66K, IP67, IP68 inserted and tightened (EN 60529)
------------	---

Locking material	Stainless Steel 1.4404 (V4A)
------------------	------------------------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85444290
-----------------------	----------

minimum order quantity	1
------------------------	---