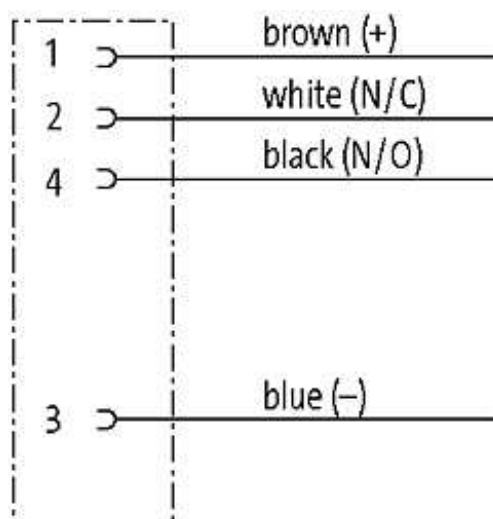


M12 STEEL FEMALE 0°


TPE-S-OB 4X0.34 GRAY, 12m


Female straight
4-pole

Further cable lengths on request.

[Link to Product](#)**Illustration**


Female

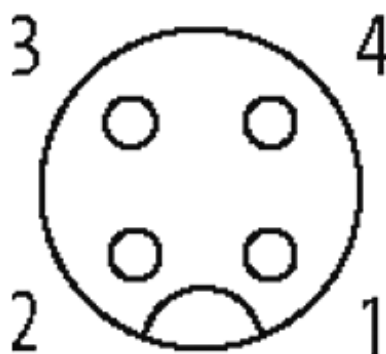

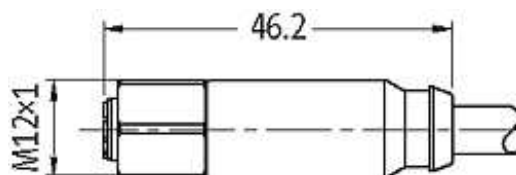

Product may differ from Image

Approvals

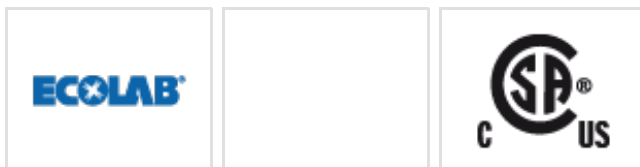

Form

Form 12221

Cables

| | |
|-----------------------------|--------------------------|
| Cable number | 336 |
| No./diameter of wires | 4 × 0.34 mm ² |
| Wire isolation | TPE-S (br, wh, bl, bk) |
| Jacket Color | gray |
| Shore hardness outer jacket | 80 ± 5A |
| Material (jacket) | TPE-S |
| Outer Ø | approx. 5.2 mm |
| Bend radius (fixed) | 10 × outer Ø |
| Bend radius (moving) | 15 × outer Ø |
| Temperature range (fixed) | -50...+125 °C |
| Temperature range (mobile) | -30...+105 °C |

Technical Data

| | |
|-------------------------------|---|
| Operating voltage | max. 32 V AC/DC |
| Operating current per contact | max. 4 A |
| Locking of ports | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Protection | IP65, IP66K, IP67, IP68, IP69K inserted and tightened (EN 60529) |
| Locking material | Stainless Steel 1.4404 (V4A) |

Commercial data

| | |
|------------------------|----------|
| country of origin | CZ |
| customs tariff number | 85444290 |
| minimum order quantity | 1 |