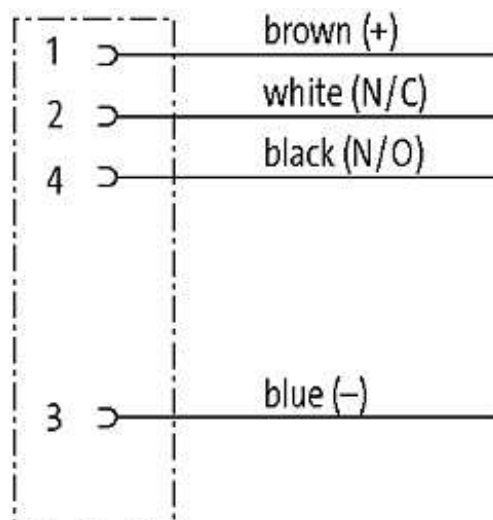
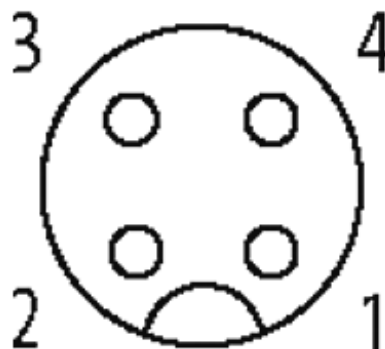



**M12 STEEL FEMALE 0°**

TPE-S-OB 4X0.34 GRAY, 30m

Female straight  
4-pole


Further cable lengths on request.

[Link to Product](#)**Illustration****Female**

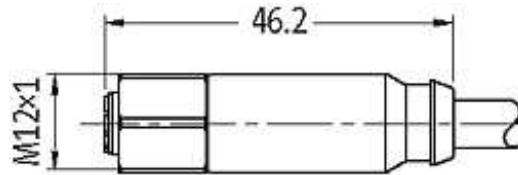

Product may differ from Image

### Approvals

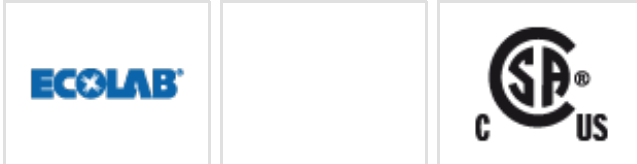

### Form

Form 12221

### Cables

Cable number	336
No./diameter of wires	4 × 0.34 mm <sup>2</sup>
Wire isolation	TPE-S (br, wh, bl, bk)
Jacket Color	gray
Shore hardness outer jacket	80 ± 5A
Material (jacket)	TPE-S
Outer Ø	approx. 5.2 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-50...+125 °C
Temperature range (mobile)	-30...+105 °C

### Technical Data

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP65, IP66K, IP67, IP68, IP69K inserted and tightened (EN 60529)
Locking material	Stainless Steel 1.4404 (V4A)

### Commercial data

country of origin	CZ
customs tariff number	85444290
minimum order quantity	1