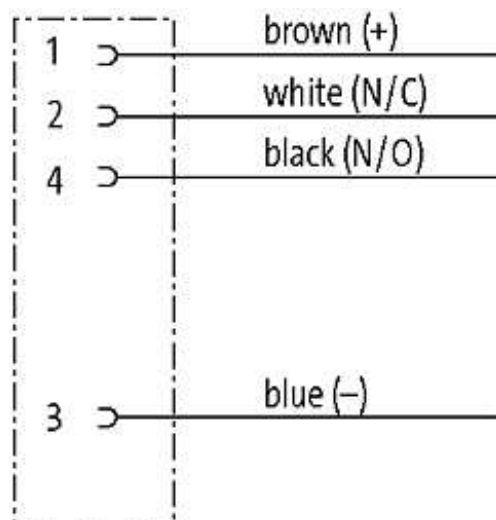
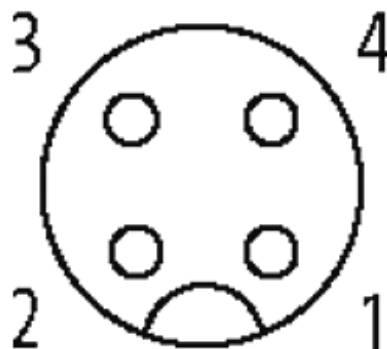



**M12 STEEL FEMALE 0°**

TPE-S-OB 4X0.34 GRAY, 40m

Female straight  
4-pole

Further cable lengths on request.

[Link to Product](#)**Illustration****Female**

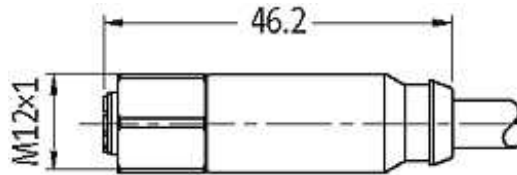

Product may differ from Image

### Approvals



### Form

Form 12221

### Cables

|                             |                          |
|-----------------------------|--------------------------|
| Cable number                | 336                      |
| No./diameter of wires       | 4 × 0.34 mm <sup>2</sup> |
| Wire isolation              | TPE-S (br, wh, bl, bk)   |
| Jacket Color                | gray                     |
| Shore hardness outer jacket | 80 ± 5A                  |
| Material (jacket)           | TPE-S                    |
| Outer Ø                     | approx. 5.2 mm           |
| Bend radius (fixed)         | 10 × outer Ø             |
| Bend radius (moving)        | 15 × outer Ø             |
| Temperature range (fixed)   | -50...+125 °C            |
| Temperature range (mobile)  | -30...+105 °C            |

### Technical Data

|                               |   |
|-------------------------------|---|
| Operating voltage             | max. 32 V AC/DC   |
| Operating current per contact | max. 4 A  |
| Locking of ports              | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Protection                    | IP65, IP66K, IP67, IP68, IP69K inserted and tightened (EN 60529)  |
| Locking material              | Stainless Steel 1.4404 (V4A)                                      |

### Commercial data

|                        |          |
|------------------------|----------|
| country of origin      | CZ       |
| customs tariff number  | 85444290 |
| minimum order quantity | 1        |