

stay connected

## MQ12 FEMALE 90°

PVC 4X0.34 black 5m

Female 90° 4-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

### **Link to Product**

#### Illustration




white (N/C) black (N/O)
black (N/O)
blue (–)
2334 /



stay connected

# **Female**

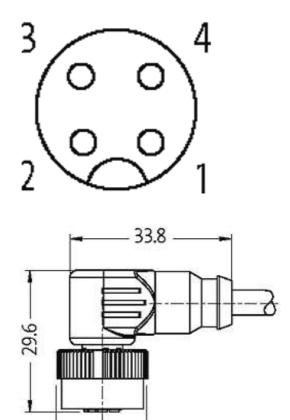

Product may differ from Image

#### **Approvals**



Form 12341  Cables  Cable number 614  No./diameter of wires $4 \times 0.34 \text{ mm}^2$ Wire isolation PVC (br, wh, bl, bk)  Jacket Color black  Shore hardness outer jacket $85 \pm 5A$ Material (jacket) PVC (UL/CSA)  Outer Ø approx. 5.0 mm  Bend radius (fixed) $5 \times \text{outer } \emptyset$	Form	
Cable number         614           No./diameter of wires         4 × 0.34 mm²           Wire isolation         PVC (br, wh, bl, bk)           Jacket Color         black           Shore hardness outer jacket         85 ± 5A           Material (jacket)         PVC (UL/CSA)           Outer Ø         approx. 5.0 mm	Form	12341
No./diameter of wires $4 \times 0.34 \text{ mm}^2$ Wire isolationPVC (br, wh, bl, bk)Jacket ColorblackShore hardness outer jacket $85 \pm 5A$ Material (jacket)PVC (UL/CSA)Outer $\emptyset$ approx. $5.0 \text{ mm}$	Cables	
Wire isolation       PVC (br, wh, bl, bk)         Jacket Color       black         Shore hardness outer jacket       85 ± 5A         Material (jacket)       PVC (UL/CSA)         Outer Ø       approx. 5.0 mm	Cable number	614
Jacket ColorblackShore hardness outer jacket $85 \pm 5A$ Material (jacket)PVC (UL/CSA)Outer $\emptyset$ approx. 5.0 mm	No./diameter of wires	$4 \times 0.34 \text{ mm}^2$
Shore hardness outer jacket $85 \pm 5A$ Material (jacket)PVC (UL/CSA)Outer $\emptyset$ approx. 5.0 mm	Wire isolation	PVC (br, wh, bl, bk)
Material (jacket)         PVC (UL/CSA)           Outer Ø         approx. 5.0 mm	Jacket Color	black
Outer Ø approx. 5.0 mm	Shore hardness outer jacket	85 ± 5A
	Material (jacket)	PVC (UL/CSA)
Bend radius (fixed) 5 × outer Ø	Outer Ø	approx. 5.0 mm
· · ·	Bend radius (fixed)	5 × outer Ø



stay connecte	d
---------------	---

Bend radius (moving)	10 × outer Ø	- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1
Temperature range (fixed)	-30+80 °C	
Temperature range (mobile)	-5+80 °C	
General data		
Temperature range	-25+85 °C, depending on cable quality	
Technical Data		
Operating voltage	max. 250 V AC/DC	
Operating current per contact	max. 4 A	
Locking of ports	Quick connection, 1/4 turn	
Protection	IP67 inserted and tightened (EN 60529)	
Commercial data		
country of origin	DE	
customs tariff number	85444290	
minimum order quantity	1	