


**MQ12 FEMALE 90°**

PUR 4X0.34 black UL/CSA, drag ch 2m



Female 90°

4-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

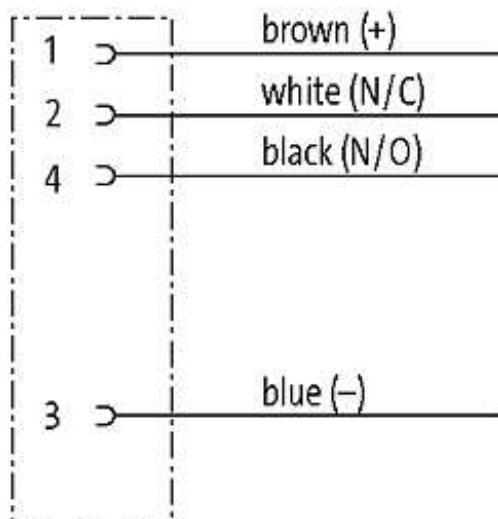**Link to Product****Illustration**

# Female

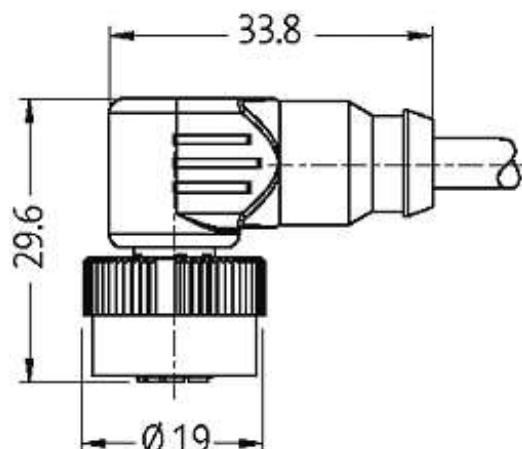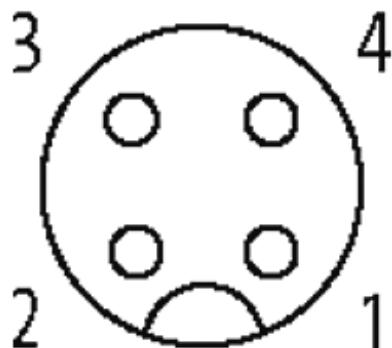

Product may differ from Image

## Approvals



## Form

Form 12341

## Cables

Cable number 634

No./diameter of wires  $4 \times 0.34 \text{ mm}^2$

Wire isolation PP (br, wh, bl, bk)

C-track properties 5 Mio.

Torsion 2 Mio.  $\pm 180^\circ/\text{m}$

Jacket Color black

Shore hardness outer jacket  $90 \pm 5\text{A}$

Material (jacket) PUR (UL/CSA)

Outer Ø	approx. 4.7 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+80 °C

**General data**

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

**Technical Data**

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Quick connection, 1/4 turn
Protection	IP67 inserted and tightened (EN 60529)

**Commercial data**

country of origin	DE
customs tariff number	85444290
minimum order quantity	1