

**M8 MALE 0°**


PUR 3X0.34 black UL/CSA, drag ch 3.0m


M8

Male straight

3-pole

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

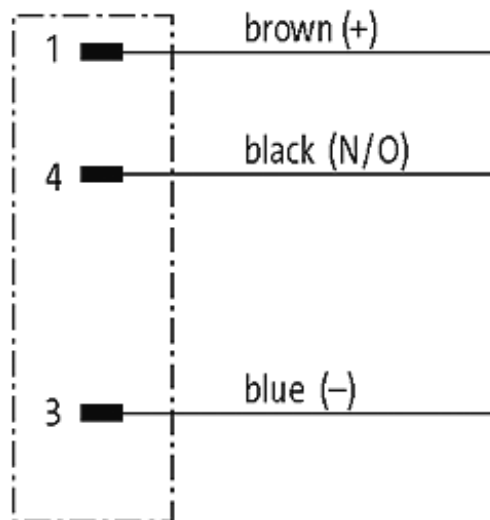[Link to Product](#)**Illustration**

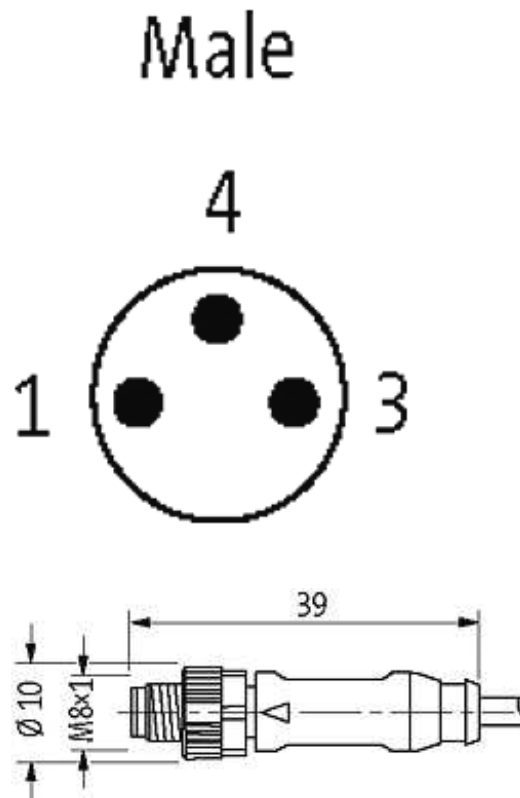

Product may differ from Image

## Approvals



\* only for products with UL/CSA approved cable

## Form

Form 08001

## Cables

Cable number	633
No./diameter of wires	3 × 0.34 mm <sup>2</sup>
Wire isolation	PP (br, bl, bk)
C-track properties	5 Mio.
Torsion	2 Mio. ± 180°/m
Jacket Color	black
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 4.3 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

---

Temperature range (mobile)	-25...+80 °C
----------------------------	--------------

**Technical Data**

---

Operating voltage	max. 60 V AC/DC
-------------------	-----------------

---

Operating current per contact	max. 4 A
-------------------------------	----------

---

Locking of ports	Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing
------------------	--

---

Protection	IP66K, IP67 inserted and tightened (EN 60529)
------------	---

**Commercial data**

---

country of origin	DE
-------------------	----

---

customs tariff number	85444290
-----------------------	----------

---

minimum order quantity	100
------------------------	-----