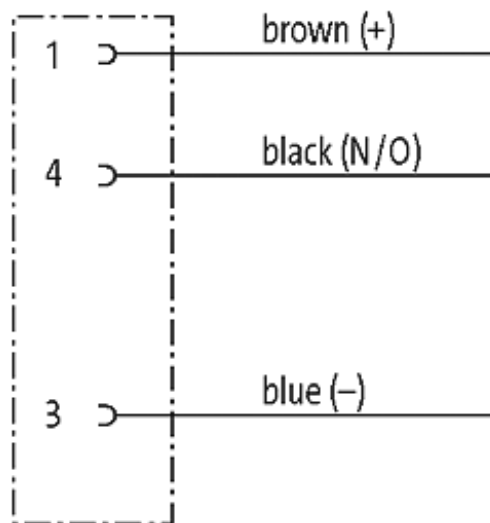


**M8 FEMALE 0°**


PUR 3X0.34 black 5m

M8  
Female straight  
3-pole

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request. Further cable lengths on request.

[Link to Product](#)**Illustration**

# Female

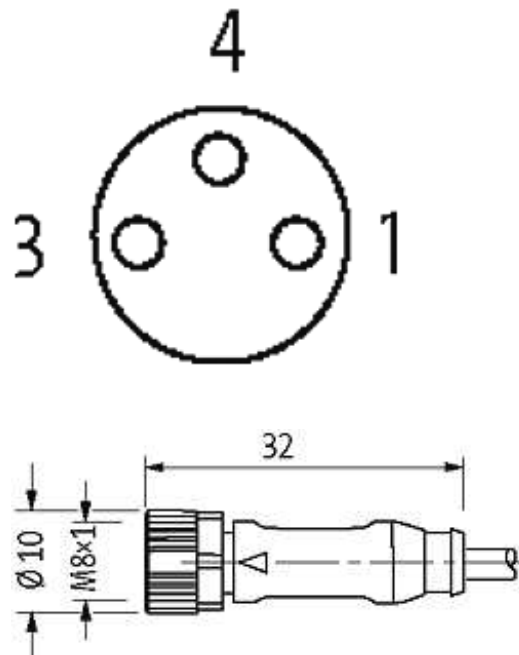

Product may differ from Image

## Approvals



\* only for products with UL/CSA approved cable

## Form

Form 08041

## Cables

|                             |                          |
|-----------------------------|--------------------------|
| Cable number                | 623                      |
| No./diameter of wires       | 3 × 0.34 mm <sup>2</sup> |
| Wire isolation              | PVC (br, bl, bk)         |
| C-track properties          | 2 Mio.                   |
| Jacket Color                | black                    |
| Shore hardness outer jacket | 85 ± 5A                  |
| Material (jacket)           | PUR/PVC (UL/CSA)         |
| Outer Ø                     | approx. 4.9 mm           |
| Bend radius (fixed)         | 10 × outer Ø             |
| Bend radius (moving)        | 15 × outer Ø             |
| Temperature range (fixed)   | -30...+80 °C             |

Temperature range (mobile) -5...+80 °C

**Technical Data**

Operating voltage max. 60 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing

Protection IP66K, IP67 inserted and tightened (EN 60529)

**Commercial data**

country of origin DE

customs tariff number 85444290

minimum order quantity 100