


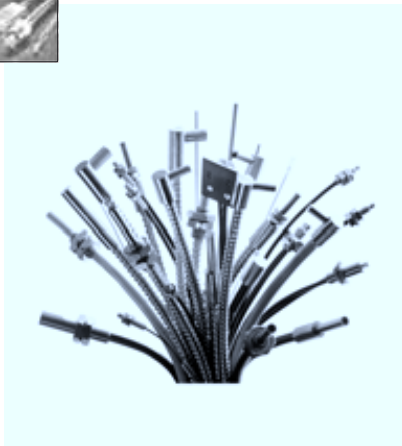

Model Number

KLR 00-2,2-2,0-K57

Plastic fiber optic - diffuse
M6 threading

Features

- Thread M6
- Bendable tip

Series

Fiber optic amplifiers

Device series SU18 ; SU18/35 ; SU19

Description

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Accessories

OMH-LL-M6

Mounting bracket for fiber optic cable, M6 thread

KM6-0,5

Metal protection for plastic fiber optics M6 x 0.5 m

KM6-1,0

Metal protection for plastic fiber optics M6 x 1.0 m

KL-CUT2

Cutter for plastic fiber optics

Technical data

General specifications

Sensor range		SU18: 60 mm SU18/35: 210 mm SU19: 60 mm
Fiber optic length	l	2000 mm
Fiber optic diameter	d	2.2 mm
Adapter form		00
End piece		Bendable tip
Bending radius		min. 15 mm
Fiber configuration	Fv	see dimensions
Angle of divergence		67 °

Ambient conditions

Ambient temperature	-20 ... 85 °C (-4 ... 185 °F) [Adapter] -30 ... 85 °C (-22 ... 185 °F) [End head]
---------------------	--

Mechanical specifications

Material	
Optical face	plastic
Sheathing	PVC
Core	plastic
End piece	Stainless steel 1.4305 / AISI 303

Dimensions

