



Model Number


OJ3000-M1K-E23

Retroreflective sensor with polarization filter
with terminal compartment

Features

- Light/dark ON parameterisable
- Visible red light
- Glare protected with polarization filter
- Pre-fault indication and output (dynamic and static)
- Protected against mutual interference
- Removable terminal compartment
- Adjustable sensor head


Dimensions

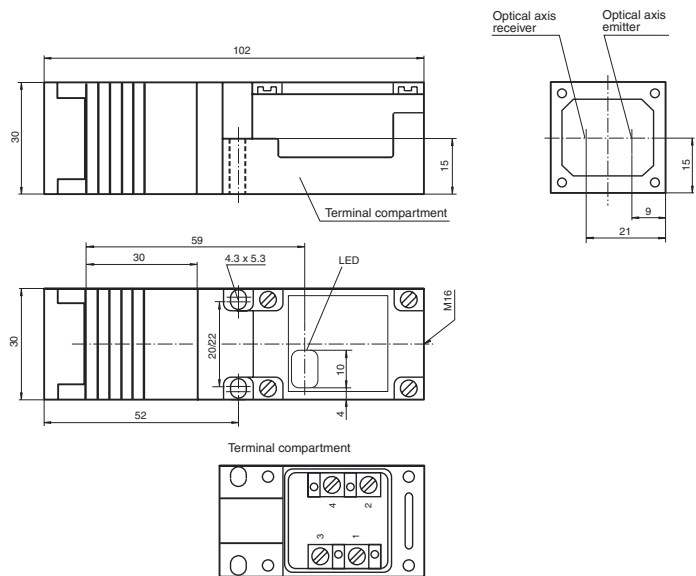

Electrical connection


Option:

E23



○ = Light on
● = Dark on

Selector switches in terminal compartment

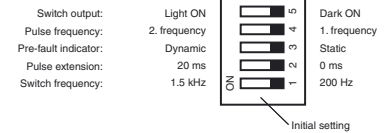

Technical data

General specifications

Effective detection range	0 ... 3000 mm
Reflector distance	200 ... 3000 mm
Threshold detection range	6 m
Reference target	reflector C110-2
Light source	LED
Light type	modulated visible red light
Approvals	CE
Ambient light limit	10000 Lux

Indicators/operating means

Operating display	LED green
Function display	LED yellow: switching state LED red: stability control (flashing)
Controls	programming switch: bright/dark changeover switch selection of the operating frequency selection of the switching frequency pulse extension stability control dynamic/static

Electrical specifications

Operating voltage	U_B	10 ... 30 V DC
Ripple		10 %
No-load supply current	I_0	≤ 35 mA

Output

Output of the pre-fault indication	1 PNP, active when falling short of the stability control	
Switching type	light/dark on switchable	
Signal output	1 PNP output, short-circuit protected, protected from reverse polarity, open collector	
Switching voltage	max. 30 V DC	
Switching current	≤ 200 mA	
Voltage drop	U _d	≤ 2.5 V
Switching frequency	f	≤ 1.5 kHz / 200 Hz switchable
Response time	2.5 ms by 200 kHz , 0.3 ms at 1.5 kHz	
Timer function	pulse extension 20 ms, switchable	

Standard conformity

Standards	EN 60947-5-2
-----------	--------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 80 °C (-40 ... 176 °F)

Mechanical specifications

Protection degree	IP67
Connection	M16 terminal compartment, core cross-section ≤ 2.5 mm ²
Material	
Housing	PBT
Optical face	Scratch resistant mineral glass lens
Mass	100 g

Approvals and certificates

CCC approval	Products with a maximum operating voltage of ≤36 V do not bear a CCC marking because they do not require approval.
--------------	--

Curves/Diagrams

