

Features

- 2-channel
- DC version, negative polarity
- Working voltage 13 V at 10 μ A
- Series resistance max. 121 Ω
- Fuse rating 63 mA
- DIN rail mounting
- Replaceable fuse

Function


The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area.

The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has a negative polarity, i. e. the cathodes of the zener diodes are grounded.



Additionally this Zener Barrier is equipped with a replaceable fuse.

Depending on the application, increased or decreased intrinsic safety parameters apply for serial or parallel connection. For the detailed parameters refer to the Zener Barrier certificate. Application examples can be found in the system description of the Zener Barriers.

Assembly

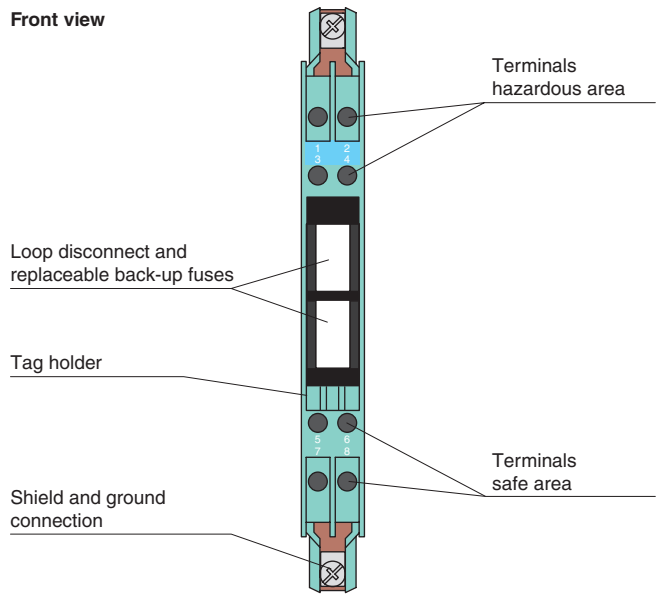

Connection

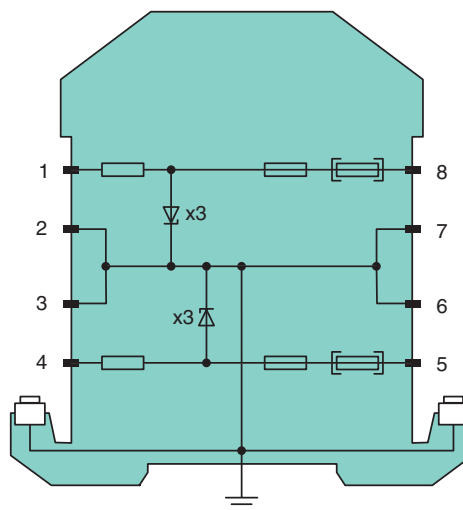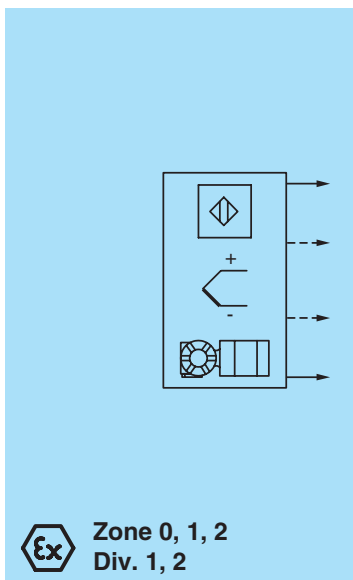

Zone 2
Div. 2

Release date 2015-02-19 15:19 Date of issue 2015-02-19 072210_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

| | |
|---|--|
| General specifications | |
| Type | DC version, negative polarity |
| Electrical specifications | |
| Nominal resistance | 100 Ω |
| Series resistance | max. 121 Ω |
| Fuse rating | 63 mA |
| Hazardous area connection | |
| Connection | terminals 1, 2, 3, 4 |
| Safe area connection | |
| Connection | terminals 5, 6, 7, 8 |
| Working voltage | max. 13.3 V , 13 V at 10 μA |
| Conformity | |
| Degree of protection | IEC 60529 |
| Ambient conditions | |
| Ambient temperature | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | -25 ... 70 °C (-13 ... 158 °F) |
| Relative humidity | max. 75 % , without moisture condensation |
| Mechanical specifications | |
| Degree of protection | IP20 |
| Connection | self-opening connection terminals, max. core cross-section 2 x 2.5 mm ² |
| Mass | approx. 150 g |
| Dimensions | 12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 in) |
| Construction type | modular terminal housing , see system description |
| Mounting | on 35 mm DIN mounting rail acc. to EN 60715:2001 |
| Data for application in connection with Ex-areas | |
| EC-Type Examination Certificate | BAS 00 ATEX 7096 , for additional certificates see www.pepperl-fuchs.com |
| Group, category, type of protection | ⊕ II (1)GD, I (M1) [Ex ia] IIC, [Ex iaD], [Ex ia] I (-20 °C ≤ T _{amb} ≤ 60 °C) [circuit(s) in zone 0/1/2] |
| Voltage U _o | 14.7 V |
| Current I _o | 150 mA |
| Power P _o | 550 mW |
| Supply | |
| Maximum safe voltage U _m | 250 V |
| Series resistance | min. 98 Ω |
| Statement of conformity | TÜV 99 ATEX 1484 X , observe statement of conformity |
| Group, category, type of protection, temperature class | ⊕ II 3G Ex nA II T4 [device in zone 2] |
| Directive conformity | |
| Directive 94/9/EC | EN 60079-0:2012, EN 60079-11:2012, EN 60079-15:2010 |
| International approvals | |
| FM approval | |
| Control drawing | 116-0118 |
| UL approval | |
| Control drawing | 116-0355 (cULus) |
| CSA approval | |
| Control drawing | 116-0119 |
| General information | |
| Supplementary information | EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com . |

Release date 2015-02-19 15:19 Date of issue 2015-02-19 072210_eng.xml