

**Features**

- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Current input/output 4 mA ... 20 mA
- transmitter power supply
- Accuracy 0.1 %
- Reverse polarity protection
- Up to SIL2 acc. to IEC 61508

**Function**


This signal conditioner provides the galvanic isolation between field circuits and control circuits.

The device can be used as a repeater or transmitter power supply for 2-wire transmitters.

This device is loop powered. No additional power supply has to be connected.

Use the technical data to verify that proper voltage is available to the field devices.


**Assembly**

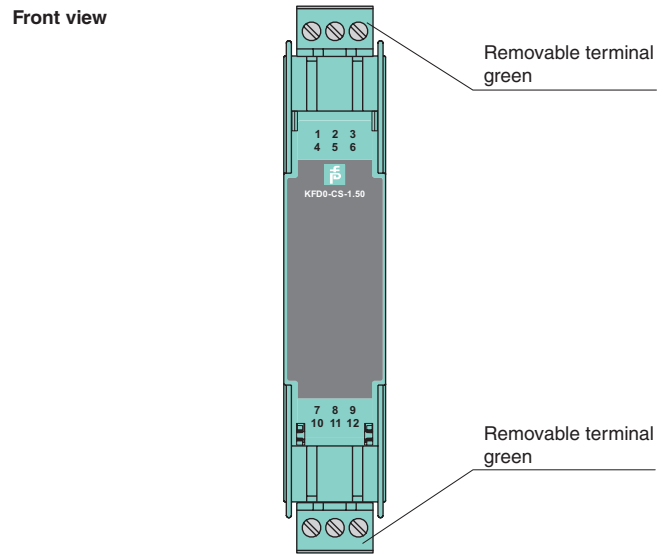

CE

SIL2

**Connection**

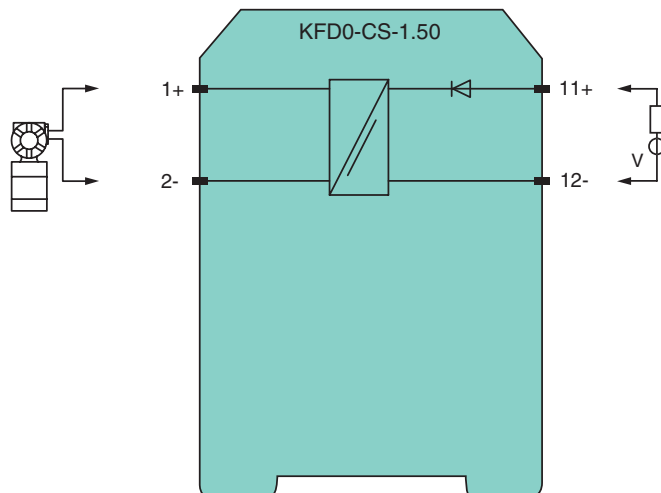

Release date 2015-04-08 13:57 Date of issue 2015-04-08 126991\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>	
Signal type	Analog input
<b>Supply</b>	
Rated voltage $U_n$	loop powered
Power loss	0.2 W
<b>Control circuit</b>	
Connection	terminals 12-, 11+
Voltage	10 ... 35 V DC
Current	4 ... 20 mA
Power loss	< 150 mW per channel at 25 mA and $U < 26.1$ V < 400 mW per channel at 25 mA und $U > 26.1$ V
<b>Field circuit</b>	
Connection	terminals 1+, 2-
Voltage	$\geq 0.9 \times U_{in} - (0.23 \times \text{current in mA}) - 0.7$ for $10 \text{ V} < U_{in} < 26.1 \text{ V}$ $\geq 23 \text{ V} - (0.23 \times \text{current in mA})$ for $U_{in} > 26.1 \text{ V}$
Short-circuit current	max. 100 mA
Transfer current	max. 25 mA
<b>Transfer characteristics</b>	
Deviation	
After calibration	$U_{in} \geq 5 \text{ V} \pm 20 \mu\text{A} / U_{in} \leq 5 \text{ V} \pm 50 \mu\text{A}$ incl. calibration, linearity, hysteresis and output load fluctuations at 20 °C (68 °F)
Influence of ambient temperature	$\leq \pm 2 \mu\text{A/K}$ at $U_{in} \leq 20 \text{ V}$ ; $\leq \pm 5 \mu\text{A/K}$ at $U_{in} > 20 \text{ V}$
Rise time	$\leq 5 \text{ ms}$ at 4 ... 20 mA and $U_{in} = \text{input voltage} < 26 \text{ V}$
<b>Electrical isolation</b>	
Input/Output	basic insulation according to IEC 62103, rated insulation voltage 300 $V_{eff}$
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2004/108/EC	EN 61326-1:2006
<b>Conformity</b>	
Insulation coordination	EN 50178:1997
Electromagnetic compatibility	NE 21:2006
Degree of protection	IEC 60529:2001
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>	
Degree of protection	IP20
Mass	approx. 100 g
Dimensions	20 x 107 x 115 mm (0.8 x 4.2 x 4.5 in) , housing type B1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>	
Supplementary information	Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2015-04-08 13:57 Date of issue 2015-04-08 126991\_eng.xml