




Dimensions

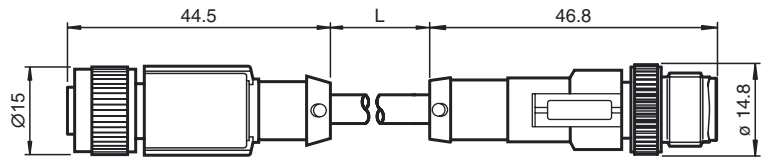

Model Number

V15B-G-5M-PUR-ABG-V15B-G

Bus cable PROFIBUS, M12 to M12, PUR cable

Features

- Shield attached to coupling nut
- Data transmission up to 12 Mbaud
- Identification sleeves
- Halogen-free

Technical data

General specifications

Number of pins	2 + shield
Transfer rate	max. 12 MBit/s
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	M12

Electrical specifications

Operating voltage	U _B	max. 250 V
Operating current		max. 4 A
Volume resistance		< 5 mΩ


Ambient conditions

Ambient temperature	Cable, moving: -20 ... 80 °C (253 ... 353 K), Cable, fixed: -40 ... 80 °C (233 ... 353 K)
Pollution Degree	3

Mechanical specifications

Protection degree	IP65 / IP67/ IP69K
Connection	5-pin M12 connector, B-coded
Material	
Contacts	CuSn
Contact surface	Ni/Au
Body	TPU, black
Cable	PUR
Slotted nut	Zinc die-casting, nickel-plated
Sleeve connector	Zinc die-casting, nickel-plated
Seal	NBR
Core insulation	PE
Cable	2 cores with 2 fillers to the core
Sheath diameter	Ø 7.8 mm
Bending radius	> 10 x cable diameter, moving
Color	violet
Cores	2 x 0.25 mm ²
Conductor construction	19 x 0.13 mm Ø
Shield	grid tin-plated copper wires, 80 % covering
Length	L 5 m

Electrical connection

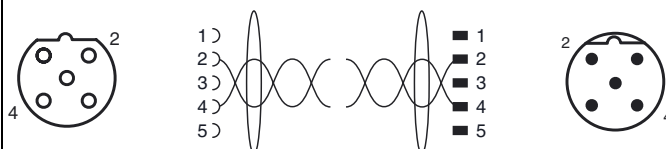

Release date: 2013-12-19 12:00 Date of issue: 2013-12-19 12:00 128299_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com