




Dimensions

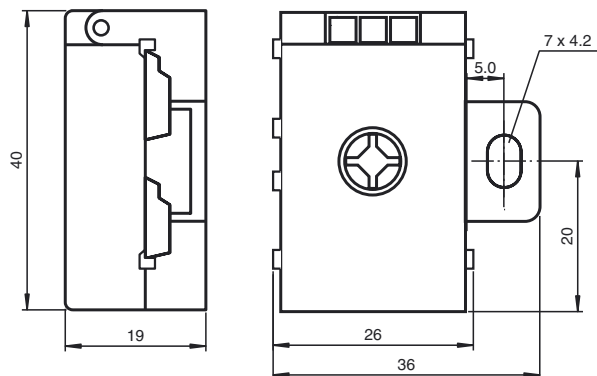

Model number


VAZ-2FK-B3

Distributor for 2 AS-Interface-flat cables

Features

- Fixing component with captive screw
- Gold plated and solid contact pins
- Precise position contacting using mechanical pivoting system
- Simple and fast mounting
- Housing made of fiberglass reinforced plastic

Electrical connection

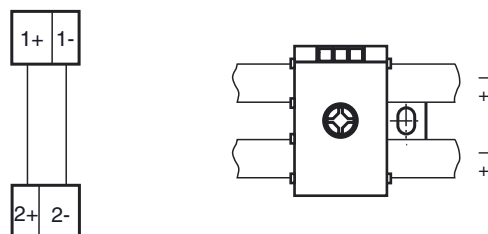

Technical data

Electrical specifications

Rated operating voltage	U_e	≤ 35 V PELV
Rated operating current	I_e	≤ 8 A
Surge protection		overvoltage category II, safe isolated power supplies (PELV)

Ambient conditions

Ambient temperature	-25 ... 75 °C (-13 ... 167 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)

Mechanical specifications

Protection degree	IP67 / IP68 / IP69k
Connection	AS-Interface flat cable
Material	
Housing	PA 66-GF25 Ultramid
Mass	25 g
Tightening torque, fastening screws	1.65 Nm

Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529:2000