





**Model number**  
**VBG-PB-K25**  
 PROFIBUS gateway

- Features**
- Gateway compliant with AS-Interface specification 3.0
  - Compact stainless steel housing
  - 7-segment display of addresses and error messages
  - Connection to PROFIBUS DP
  - Commissioning, without PROFIBUS communication
  - All AS-Interface functions possible via PROFIBUS

**Dimensions**

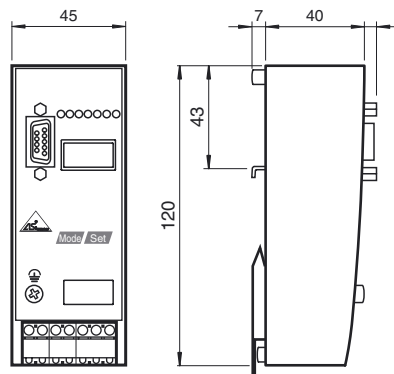


**Electrical connection**

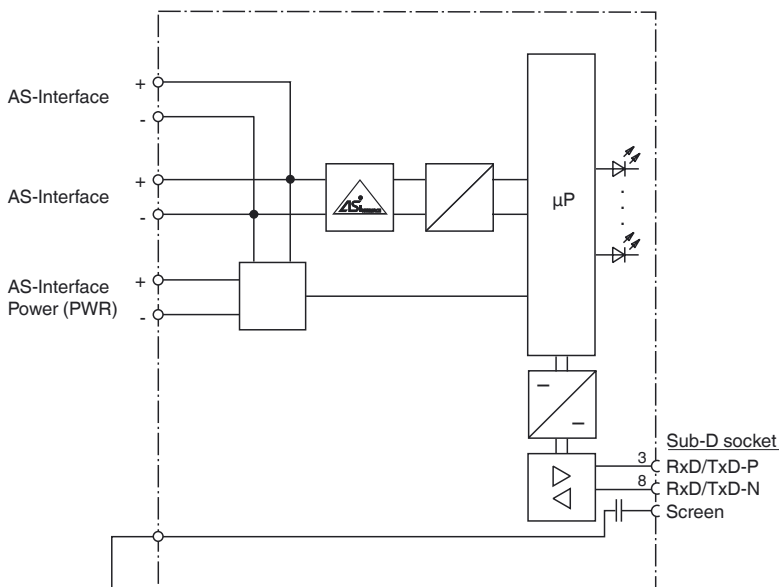

At the cable for power supply no slaves or repeaters may be attached.  
 At the cable for AS-Interface circuit no power supplies or further masters may be attached.

**Indicating / Operating means**

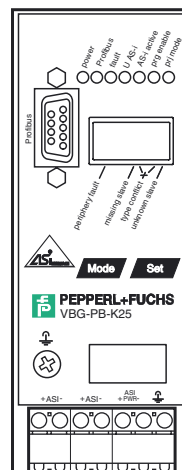

Release date: 2012-05-11 08:36 Date of issue: 2014-01-13 187124\_eng.xml

**Technical data****General specifications**

AS-Interface specification	V3.0
PLC-Functionality	activateable
Earth fault detection	EFD integrated
EMC monitoring	integrated
Diagnostics function	integrated
UL File Number	E223772

**Functional safety related parameters**

MTTF <sub>d</sub>	105 a at 30 °C
-------------------	----------------

**Indicators/operating means**

Display	address display, error message LED display, 3 digits, for addressing and error messages
LED PROFIBUS	PROFIBUS master detected; LED green
LED AS-i ACTIVE	AS-Interface operation normal; LED green
LED CONFIG ERR	configuration error; LED red
LED PRG ENABLE	autom. programming; LED green
LED POWER	voltage ON; LED green
LED PRJ MODE	projecting mode active; LED yellow
LED U AS-i	AS-Interface voltage; LED green
Switch SET	Selection and setting of a slave address
Button MODE	Mode selection PRJ-operation/save configuration/cursor

**Electrical specifications**

Insulation voltage	$U_i$	$\geq 500$ V
Rated operating voltage	$U_e$	from AS-Interface
Rated operating current	$I_e$	$\leq 200$ mA from AS-Interface

**Interface**

Interface type	RS 485
Protocol	PROFIBUS DP V0 and V1
Transfer rate	9.6 kBit/s ... 12 MBit/s , Automatic baud rate detection

**Connection**

PROFIBUS	Sub-D interface
AS-Interface	spring terminals, removable

**Ambient conditions**

Ambient temperature	0 ... 55 °C (32 ... 131 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)

**Mechanical specifications**

Protection degree	IP20
Mass	approx. 460 g
Construction type	Low profile housing , Stainless steel

**Compliance with standards and directives**

Standard conformity	
Electromagnetic compatibility	EN 61000-6-2, EN 61000-6-4
Protection degree	EN 60529
Shock and impact resistance	EN 61131-2

**Function**

The VBG-PB-K25 is a PROFIBUS Gateway in accordance with AS-Interface Specification 3.0 and to IP20. The compact construction makes it particularly suitable for use in the control cabinet.

The VBG-PB-K25 is a modular PROFIBUS Slave. This means, that the PROFIBUS configuration tool can be used to determine which data are to be transferred via PROFIBUS. The quantity of data to be transferred via PROFIBUS can be adapted by this means.

This gateway supports the acyclic communication of the PROFIBUS DP V1. With the help of this acyclic service a mail box in the gateway for both AS-Interface masters can be addressed, via which all data made available by the AS-Interface/PROFIBUS gateway can be accessed. Address assignment, acceptance of the set configuration, the setting of the PROFIBUS and baud rate are possible via push button. 7 LEDs, mounted on the front, indicate the current status of the AS-Interface network.

This gateway can be used to keep the commissioning of the AS-Interface circuit, as well as the test of the connected peripherals, completely separate from the commissioning of the PROFIBUS and the programming. Local operation using the LED display and the 2 buttons enables all the functions to be represented, which are covered by the other gateways via the AS-i Control Tools software.

**PLC functionality**

Optionally the gateway is also available with PLC-functionality. Therefore you can order a code key VAZ-CTR additionally.

**Accessories****VAZ-SW-ACT32**

Full version of the AS-I Control Tools including connection cable

**VAZ-PB-SIM**

PROFIBUS master simulator

**VAZ-PB-DB9-W**

PROFIBUS Sub-D Connector with switchable terminal resistance