




Dimensions

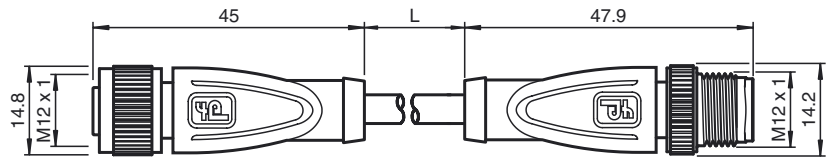

Model Number

V1-G-7,5M-PVC-V1-G
 Connecting cable, M12 to M12, PVC cable 4-pin

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Degree of protection IP67 / IP68 / IP69K
- Suitable for 2-, 3- and 4-wire technology

Technical data

General specifications

| | |
|---------------------|----------------|
| Number of pins | 4 |
| Connection 1 | socket |
| Construction type 1 | straight |
| Threading 1 | M12 |
| Connection 2 | Male connector |
| Construction type 2 | straight |
| Threading 2 | M12 |

Electrical specifications

| | | |
|-------------------|----------------|----------------------------|
| Operating voltage | U _B | max. 250 V AC/DC |
| Test voltage | | > 1500 V _{eff} AC |
| Operating current | | max. 4 A |
| Volume resistance | | < 5 mΩ |

Ambient conditions

| | | |
|---------------------|--|---|
| Ambient temperature | | cable, fixed: -25 ... 70 °C (-13 ... 158 °F) cable, flexing: -5 ... -70 °C (23 ... -94 °F) |
| Pollution Degree | | 3 |


Mechanical specifications

| | | |
|------------------------|---|-------------------------------|
| Contact elements | | spring-loaded contact socket |
| Pin diameter | | 1 mm |
| Degree of protection | | IP67 / IP68 / IP69k |
| Material | | |
| Contacts | | CuSn / Au |
| Contact surface | | Au |
| Body | | TPU, black |
| Cable | | PVC |
| Slotted nut | | Diecast zinc |
| Sleeve connector | | Diecast zinc |
| Core insulation | | PVC |
| Cable | | fine-strand, flexible |
| Sheath diameter | | Ø 4.8 mm |
| Bending radius | | > 10 x cable diameter, moving |
| Color | | grey |
| Cores | | 4 x 0.34 mm ² |
| Conductor construction | | 19 x 0.15 mm Ø |
| Length | L | 7.5 m |
| Flammability | | |
| Contact material | | 94 HB |
| Housing | | 94 V-2 |

Compliance with standards and directives

| | | |
|----------------------|--|---------------|
| Standard conformity | | |
| Degree of protection | | EN 60529:2000 |

Electrical connection

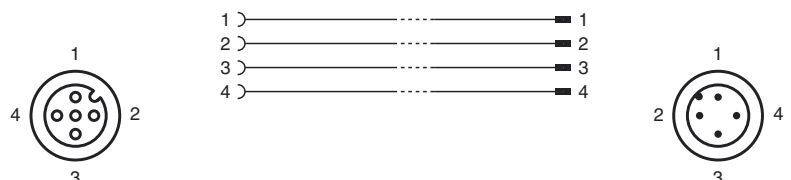

Release date: 2014-07-04 13:38 Date of issue: 2014-07-04 192089_eng.xml



| | |
|--------------|----------------------|
| Standards | IEC 61076-2-101:2008 |
| Flammability | Grip: UL 94 |

Release date: 2014-07-04 13:38 Date of issue: 2014-07-04 192069_eng.xml