




**Dimensions**

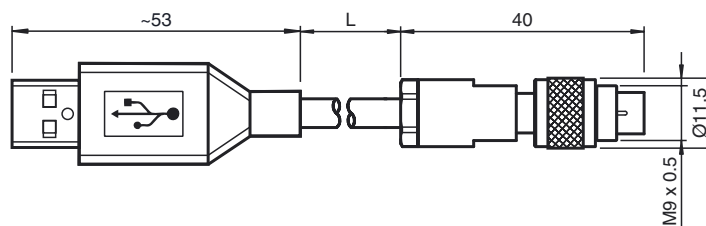

**Model Number**

**USBA-2M-PUR-V34-G**

Connection cable, USB to 4-pin M9, PUR cable

**Features**

- USB 2.0
- Suitable for 12 MBit/s (full speed)
- Redundant shielding

**Technical data**

**General specifications**

Number of pins	4
Connection 1	Male connector
Construction type 1	straight
Threading 1	Type A USB
Connection 2	Male connector
Construction type 2	straight
Threading 2	M9

**Electrical specifications**

Operating voltage	$U_B$	max. 30 V DC
Operating current		max. 100 mA


**Ambient conditions**

Ambient temperature	-40 ... 80 °C (-40 ... 176 °F)
---------------------	--------------------------------

**Mechanical specifications**

<b>Material</b>	
Cable	PUR
Slotted nut	CuZn, nickel-plated
<b>Cable</b>	
Sheath diameter	Ø 4.5 mm
Color	grey
Cores	0.081 mm <sup>2</sup> (28 AWG) 2 x 0.125 mm <sup>2</sup> (AWG26)
Shield	Foil Around data leads, braided shield around entire cable
Length	L 2 m
Mass	approx. 73 g

**Electrical connection**

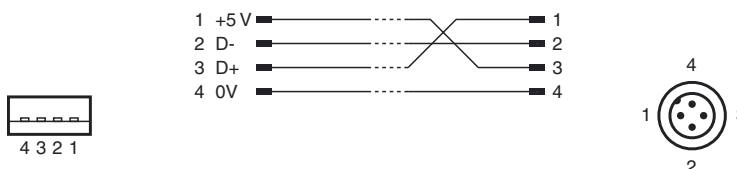

Release date: 2012-01-18 10:12 Date of issue: 2012-01-18 204957\_eng.xml