




Model Number

V19-G-5M-PUR-ABG-SUBD15
 Connection cable, M12 to SUB-D, PUR
 cable 8-pin

Features

- M12 to Sub-D adapter

Dimensions

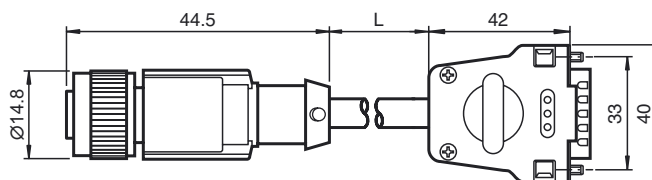

Technical data

General specifications

Number of pins	8
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	Sub-D

Electrical specifications

Operating voltage	U _B	max. 30 V AC/DC
Operating current		max. 2 A


Ambient conditions

Ambient temperature	Body: -25 ... 90 °C (-13 ... 194 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
---------------------	--

Mechanical specifications

Material	
Contacts	CuSn
Contact surface	Au
Body	TPU, green
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP
Cable	extra-fine wire, flexible
Sheath diameter	Ø 5.9 mm
Bending radius	> 10 x cable diameter, moving > 8 x cable diameter, fixed
Color	black
Cores	8 x 0.25 mm ²
Conductor construction	32 x 0.1 mm Ø
Shield	grid covering 85 %
Length	L 5 m

Electrical connection

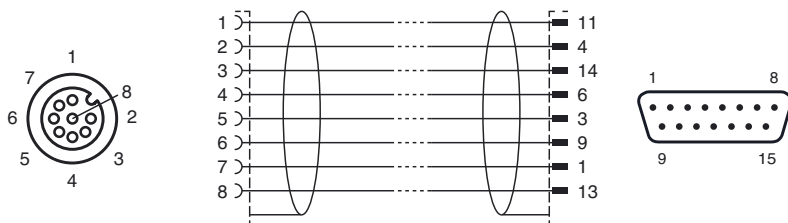

Release date: 2013-03-26 17:50 Date of issue: 2013-04-08 223360_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group
 www.pepperl-fuchs.com

USA: +1 330 486 0001
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
 fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs
 Singapore: +65 6779 9091
 fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS
 SENSING YOUR NEEDS