




Dimensions

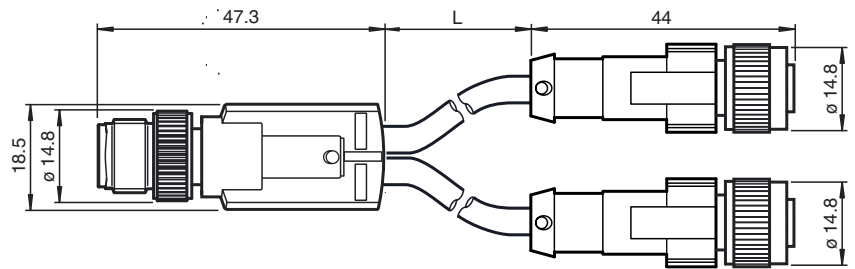

Model Number

V1-G-0,6M-PUR-H/S-TV1-G

Y connecting cable, M12 to 2xM12, 3-pin, irradiated PUR cable

Features

- Simple assembling of 2 signals to one M12 plug-in station
- Flexible sheathing
- Immunity to vibration, with mechanical latching
- Knurled nut suitable for tool assembly
- Halogen-free

Technical data

General specifications

Number of pins 3

Electrical specifications

Operating voltage U_B 250 V
 Operating current max. 4 A
 Volume resistance $< 5 \text{ m}\Omega$

Ambient conditions

Ambient temperature $-25 \dots 90 \text{ }^\circ\text{C}$ ($-13 \dots 194 \text{ }^\circ\text{F}$)
 Pollution Degree 3


Mechanical specifications

Degree of protection IP65 / IP68 / IP69K
 Connection 1 x M12 connector, straight
 2 x M12 straight sockets

Material

Contacts CuSn
 Contact surface Ni/Au
 Body TPU, black
 Cable PUR, irradiated
 Slotted nut Zinc die-casting, nickel-plated
 Sleeve connector Zinc die-casting, nickel-plated
 Cable fine-strand, flexible
 Color orange
 Cores 3 x 0.34 mm²
 Conductor construction 42 x 0.1 mm
 Length L 0.6 m

Electrical connection

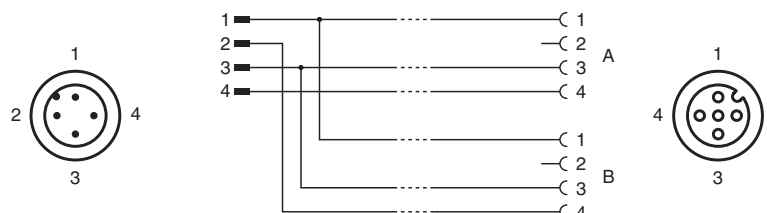

Release date: 2014-11-04 14:03 Date of issue: 2014-11-04 223517_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".