

**Model number**


**VAN-115/230AC-K19**

AS-Interface power supply, data decoupling, 2,8 A


**Features**

- Up to 2.8 A output load
- Power factor correction
- Electronic overload protection and display
- LED operating display
- AS-Interface data decoupling
- PELV/SELV
- NEC Class 2 Power Supply


**Dimensions**

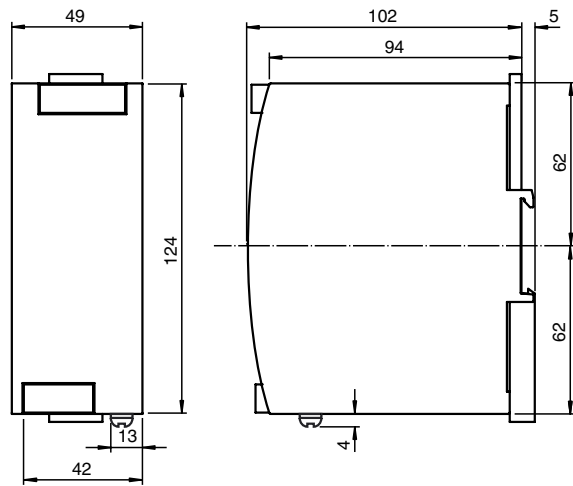

**Electrical connection**

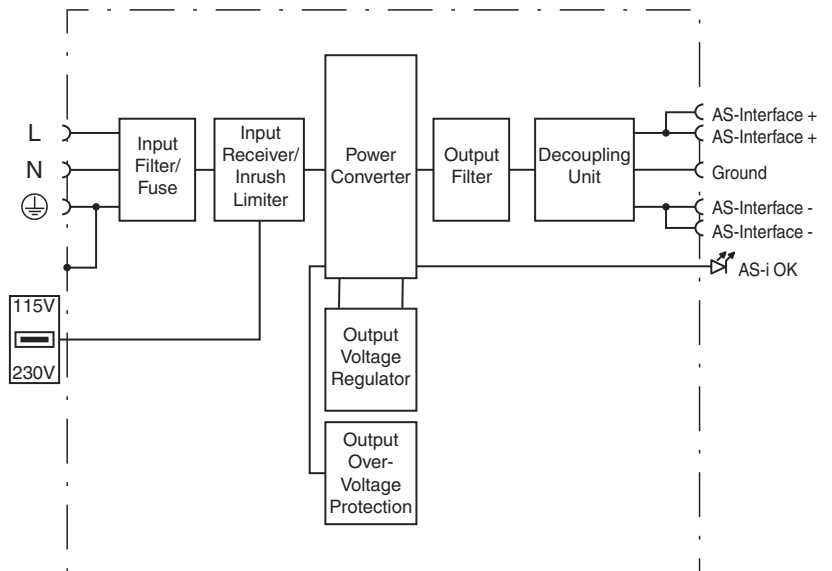

**Indicating / Operating means**

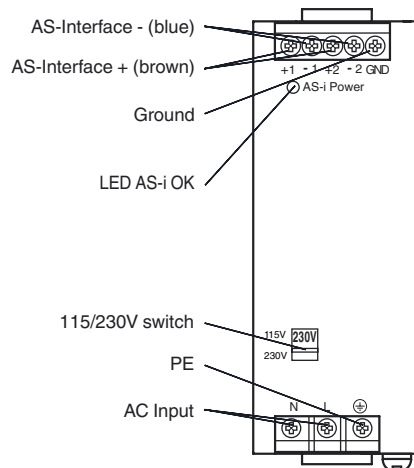

Release date: 2014-12-11 10:52 Date of issue: 2014-12-11 225875\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

## Technical data

### General specifications

UL File Number	E223176
----------------	---------

### Indicators/operating means

LED AS-i ok	LED green: ON: AS-Interface voltage OK OFF: overload or no supply voltage
-------------	---

### Electrical specifications

Fusing	2.5 AT (not replaceable)
Capacity factor	> 0.5
Rated operating voltage	$U_e$ nominal: 100 ... 120 V <sub>AC</sub> /220 ... 240 V <sub>AC</sub> permissible: 85 ... 132 V <sub>AC</sub> /184 ... 264 V <sub>AC</sub>
Rated operating current	$I_e$ 2.0 A at 115 V <sub>AC</sub> 0.9 A at 230 V <sub>AC</sub>
Supply frequency	47 ... 63 Hz
Efficiency	90.5 % (230 V <sub>AC</sub> , 2.8 A)

### Output

Current limit	> 3.2 A
Current	2.8 A
Voltage	30.55 V <sub>DC</sub> ± 3 % fixed
Residual ripple	≤ 50 mV <sub>SS</sub> (500 kHz bandwidth, 50-Ω-measurement with ohmic load)
Short-circuit current	min. 3.2 A, max. 4.6 A

### Ambient conditions

Ambient temperature	-10 ... 70 °C (14 ... 158 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Shock and impact resistance	15g/6 ms 10g/11 ms
Vibration resistance	2 ... 17.8 Hz / 1.6 mm 17.8 ... 500 Hz / 2.0 g
Pollution Degree	2 (EN 60950)

### Mechanical specifications

Degree of protection	IP20
Protection class	I, Protective conductor connection necessary
Connection	Connection terminals, max. conductor cross-section 0.5 ... 6 mm <sup>2</sup> (20-10 AWG), Stripping length 7 mm
Mass	approx. 500 g
Mounting	DIN mounting rail

### Compliance with standards and directives

Directive conformity	
Low Voltage Directive 2006/95/EC	EN 60950-1:2006, EN 61204-3:2001
EMC Directive 2004/108/EC	EN 61000-6-2:2005, EN 61000-6-3:2007, EN 50295:1999
Standard conformity	
Electromagnetic compatibility	EN 61000-6-2:2005; EN 61000-6-3:2007
AS-Interface	EN 50295:1999, IEC 62026-2:2006
Mech. capacity	EN 60068-2-6:2008
Shock and impact resistance	EN 60068-2-27:1995

## Notes

The "GND" connection must be connected to the potential of the machine in any case.

## Function

The primary pulsed power supply was developed for fieldbus applications that transfer power and data via one two-wire line (AS-Interface concept). With an output current of 2.8 A, it supplies a fully configured AS-Interface system.

In this case, the power supply is responsible for supplying power, decoupling the data to the supply source and providing for symmetry of the two output lines (AS-Interface + and AS-Interface -) relative to the machine mass (shield connection). The exact and transformer coupling permits the use of unshielded load lines.


The input voltage range of the device can be selected with a switch. Thus, the power supply can be operated on all conventional single-phase mains voltages worldwide.

### Fusing:

The power supply is protected electronically against external short circuits. The internal fuse disconnects the power supply from the network in the case of a defect.

### Derating

Output power

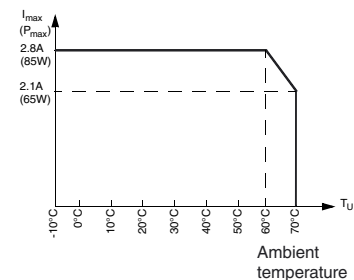

### Current limitation characteristic

Output voltage

