




**Dimensions**

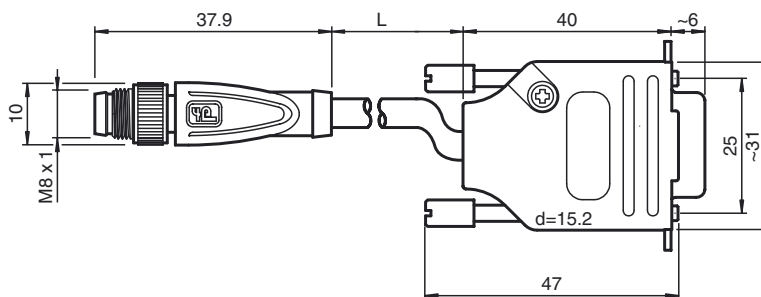

**Model Number**

**V3S-GM-0,15M-PUR-ABG-SUBD**  
 Adapter M8 on Sub-D for PC connection with null modem cable

**Features**

- EMC shielded

**Accessories**

**IVZ-K-R2**  
 Null modem cable

**Technical data**


**General specifications**

Number of pins	3
Construction type	M8 connector, straight 9-pin Sub-D connector (pin)

**Mechanical specifications**

<b>Material</b>	
Body	TPU, black
Cable	PUR
Sleeve connector	Diecast zinc
Core insulation	PP
<b>Cable</b>	
Cable	fine-strand, flexible
Sheath diameter	Ø4.8 mm
Bending radius	> 10 x cable diameter, moving 5 x cable diameter, single bend
<b>Color</b>	
Color	grey
<b>Cores</b>	
Cores	4 x 0.34 mm <sup>2</sup> 1 x shield positioned over M8 connector and Sub-D housing
<b>Conductor construction</b>	
Conductor construction	19 x 0.15 mm Ø
<b>Shield</b>	
Shield	grid covering 85 %
Length	L 0.15 m

**Electrical connection**

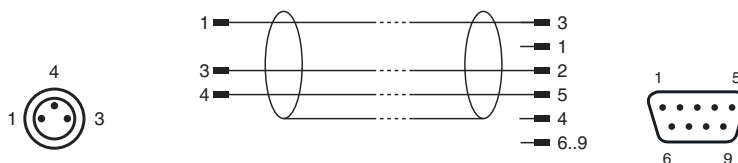

Release date: 2014-03-25 14:55 Date of issue: 2014-03-25 228636\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".