



Model Number


V1S-GV4A

Field-attachable male connector

Features

- Screw terminal connection
- Stainless steel locking
- Gold plated contacts

Dimensions

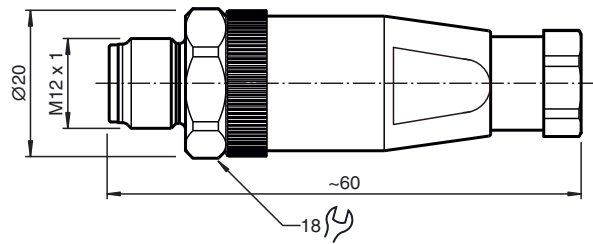

Technical data

General specifications

Number of pins	4
Connection 1	Male connector
Construction type 1	straight
Threading 1	M12

Electrical specifications

Operating voltage	U_B	max. 250 V AC/DC
Operating current		max. 4 A
Volume resistance		< 3 m Ω

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Pollution Degree	3

Mechanical specifications

Degree of protection	IP67
Connection	1 x M12 connector, straight Screw terminals for max. 0.75 mm ²

Material	
Contacts	CuZn
Contact surface	Au
Body	PA
Cable	
Sheath diameter	4 ... 6 mm

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000

Electrical connection

