



**Model Number**


**V19-G-BK25M-PUR-U**

Female cordset, M12, 8-pin, PUR-cable

**Features**

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Flame resistant cable
- Halogen-free
- Resistant to microbes and hydrolysis
- Degree of protection IP67 / IP68 / IP69K

**Dimensions**

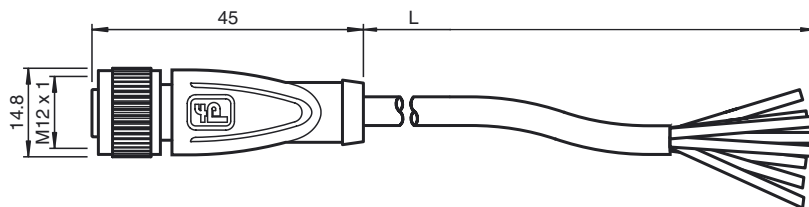

**Technical data**

**General specifications**

Number of pins	8
UL File Number	E231213

**Electrical specifications**

Operating voltage	U <sub>B</sub>	max. 30 V AC/DC
Operating current	I <sub>B</sub>	max. 2 A

**Ambient conditions**

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

**Mechanical specifications**

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k
<b>Material</b>	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 6 mm
Bending radius	> 10 x cable diameter, moving > 8 x cable diameter, fixed
Color	black
Cores	8 x 0.25 mm <sup>2</sup>
Conductor construction	14 x 0.15 mm Ø
Length	L 25 m
<b>Flammability</b>	
Contact material	HB
Housing	V-2
Cable	FT2


**Compliance with standards and directives**

<b>Standard conformity</b>	
Flammability	Grip: UL 94 Cable: UL 1581 Section 1100; IEC 60332-1-2:2004
Halogen-free	IEC 60754-1:1994

**Approvals and certificates**

UL approval	UL Recognized General purpose
Maximum permissible operating voltage ≤ 30 V	

**Electrical connection**

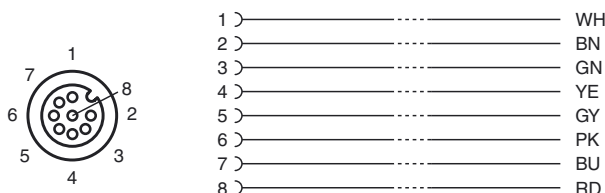

Release date: 2015-02-12 09:51 Date of issue: 2015-02-12 233844\_eng.xml



Maximum permissible ambient temperature  $\leq 80\text{ }^{\circ}\text{C}$  ( $\leq 176\text{ }^{\circ}\text{F}$ )

Release date: 2015-02-12 09:51 Date of issue: 2015-02-12 23:38:44\_eng.xml