



**CANopen** DeviceNet.

### Model Number


#### V15-G-2M-PUR-CAN

DeviceNet/CANopen bus cable, M12, PUR cable, 5-pin

### Features

- Suitable for DeviceNet and CANopen
- Suitable for drag chains
- Shield connected to pin 1
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Halogen-free

### Dimensions

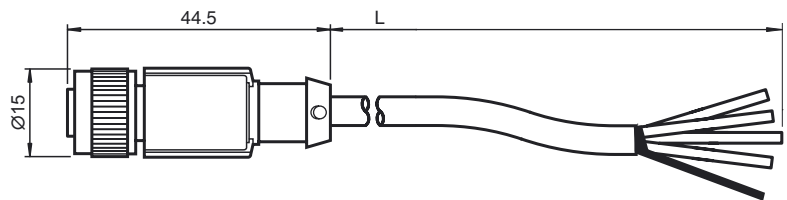

### Technical data

#### General specifications

Number of pins	5
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

#### Electrical specifications

Operating voltage	$U_B$	max. 60 V DC
Operating current		max. 4 A
Volume resistance		< 5 m $\Omega$
Insulation resistance		$\geq$ 100 M $\Omega$


#### Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 70 °C (-4 ... 158 °F)
Pollution Degree	3

#### Mechanical specifications

Degree of protection	IP65/IP67
Material	
Contacts	CuSn
Contact surface	Ni/Au
Body	TPU, black
Cable	PUR
Slotted nut	Zinc die-casting, nickel-plated
Seal	NBR
Core insulation	PE
Cable	2 pairs, each with 2 leads, wrapped around a drain wire Pair shield: aluminum laminated polyester film
Sheath diameter	Ø 6.7 mm
Bending radius	> 10 x cable diameter, moving > 10 x cable diameter, fixed
Color	violet
Cores	2 x 0.25 mm <sup>2</sup> / 24 AWG (signal line) 2 x 0.34 mm <sup>2</sup> / 22 AWG (power supply) 1 x 0.34 mm <sup>2</sup> (drain wire)
Conductor construction	19 x 0.13 mm Ø (signal wire) 19 x 0.15 mm Ø (power supply)
Shield	grid tin-plated copper wires, 80 % covering
Length	L 2 m
Drag chain suitability	
Drag chain cycles	5000000
Motion velocity	$\leq$ 3 m/s
Traverse distance	4.5 m
Acceleration	$\leq$ 3 m/s <sup>2</sup>

### Electrical connection

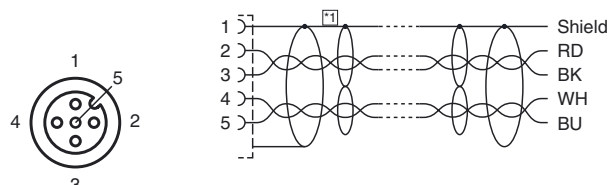



<b>Flammability</b>	
Contact material	HB
Housing	HB
Cable	FT1
<b>Compliance with standards and directives</b>	
Standard conformity	
Flammability	UL†1581 Section 1060; IEC†60332-1-2:2004
<b>Approvals and certificates</b>	
UL approval	
UL approval	AWM Style 21198
Maximum permissible operating voltage ≤ 300 V	
Maximum permissible ambient temperature ≤ 80 °C (≤ 176 °F)	

Release date: 2014-03-31 13:48 Date of issue: 2014-03-31 244536\_eng.xml