



Model Number


V1SD-G-10M-PUR-ABG

Ethernet bus cable, M12, PUR cable, 4-pin, CAT5e

Features

- D coding for Ethernet
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Shield attached to coupling nut
- Hard-wearing PUR cable
- CAT5/CAT5e cable

Dimensions

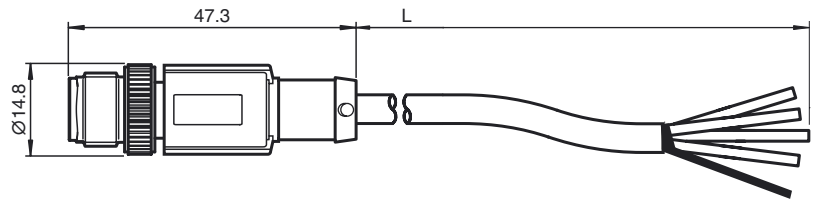

Technical data

General specifications

Number of pins	4
Connection 1	Male connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 60 V
Operating current		max. 4 A
Volume resistance		$\leq 5 \text{ m}\Omega$

Ambient conditions

Ambient temperature	Body: -25 ... 90 °C (-13 ... 194 °F) cable, fixed: -40 ... 70 °C (-40 ... 158 °F) cable, flexing: -10 ... 50 °C (14 ... 122 °F)
---------------------	---


Mechanical specifications

Protection degree	IP65 / IP67/ IP69K
Connection	M12 x 1 connector, 4-pin, D-coded
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, black
Cable	PUR
Slotted nut	Zinc die-casting, nickel-plated
Core insulation	PE
Cable	2 pairs with 2 wires each with 2 fillers for the core
Sheath diameter	6.7 mm
Bending radius	$> 5 \times$ cable diameter
Color	water blue (RAL 5021)
Cores	$2 \times 2 \times 0.14 \text{ mm}^2 / 26 \text{ AWG}$
Conductor construction	$7 \times 0.15 \text{ mm } \varnothing$
Shield	Foil-laminated polyester film Copper mesh, tin-plated, 70% coverage
Length	L 10 m

Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529:2000
Standards	CAT5 (IEC 11801:2002) , CAT5e (TIA 568B:2001) IEC 61076-2-101:2008
Flammability	IEC 60332-1-2:2004
Halogen-free	IEC 60754-1:2011

Electrical connection

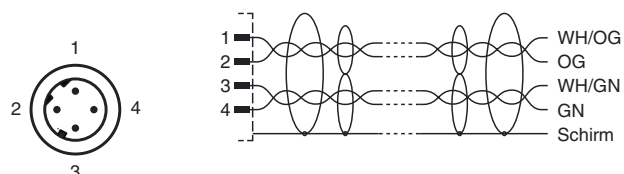

Release date: 2013-04-10 10:33 Date of issue: 2013-04-12 254569_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs
Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com