

Model Number


V19-G-60M-PVC

Female cordset, M12, 8-pin, PVC cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Dimensions

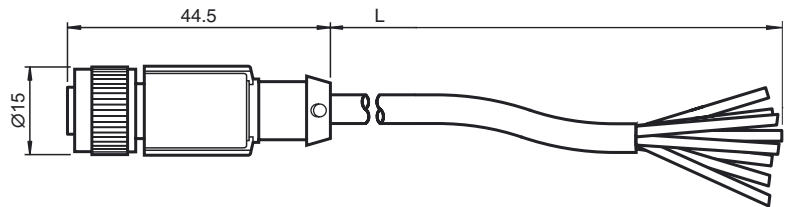

Technical data

General specifications

Number of pins	8
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 30 V DC
Operating current		max. 2 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	cable, flexing: -5 ... 70 °C (-238 ... 343 K), cable, fixed: -30 ... 70 °C (243 ... 343 K) Connector: -25 \hat{c} 90 °C (-13 \hat{c} 194 °F)
---------------------	--


Mechanical specifications

Degree of protection	IP67
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, green
Cable	PVC
Slotted nut	Zinc die-casting, nickel-plated
Seal	NBR
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	\varnothing 5.2 mm
Color	black
Cores	8 x 0.34 mm ²
Conductor construction	42 x 0.1 mm \varnothing
Length	L 60 m

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000

Electrical connection



1	WH
2	BN
3	GN
4	YE
5	GY
6	PK
7	BU
8	RD