


Dimensions

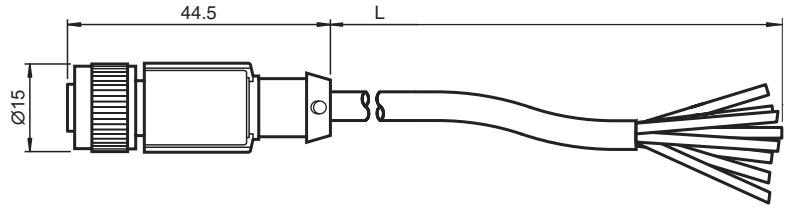

Model Number

V19-G-50M-PVC

Female cordset, M12, 8-pin, PVC cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Technical data

General specifications

Number of pins	8
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U _B	max. 30 V DC
Operating current		max. 2 A
Volume resistance		< 5 mΩ

Ambient conditions

Ambient temperature	cable, flexing: -5 ... 70 °C (-238 ... 343 K), cable, fixed: -30 ... 70 °C (243 ... 343 K) Connector: -25 ÷ 90 °C (-13 ÷ 194 °F)
---------------------	----------------------------------------------------------------------------------------------------------------------------------------


Mechanical specifications

Degree of protection	IP67
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, green
Cable	PVC
Slotted nut	Zinc die-casting, nickel-plated
Seal	NBR
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	Ø 5.2 mm
Color	black
Cores	8 x 0.34 mm ²
Conductor construction	42 x 0.1 mm Ø
Length	L 50 m

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000

Electrical connection

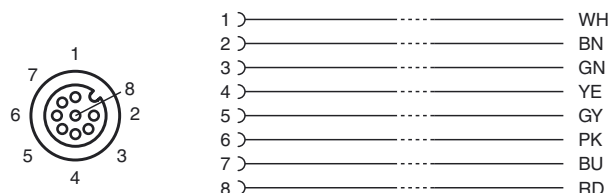

Release date: 2014-06-30 09:49 Date of issue: 2014-06-30 269193_eng.xml