




**Dimensions**

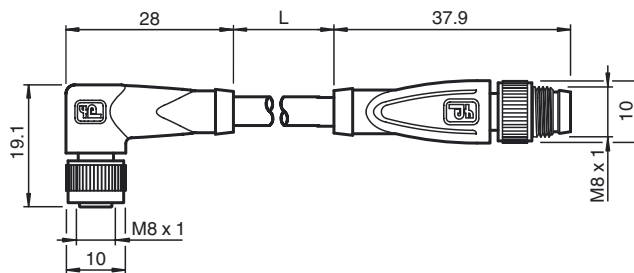

**Model Number**

**V31-WM-0,15M-PUR-V3-GM**

Connection cable, M8 to M8, 3-pin, PUR cable

**Features**

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Halogen-free
- Resistant to microbes and hydrolysis

**Technical data**

**General specifications**

Number of pins 3

**Electrical specifications**

Operating voltage  $U_B$  max. 60 V DC  
 Test voltage > 1500 V<sub>eff</sub> AC  
 Operating current  $I_B$  max. 3 A  
 Volume resistance < 5 mΩ

**Ambient conditions**


Ambient temperature -40 ... 90 °C (-40 ... 194 °F)  
 cable, fixed: -40 ... 80 °C (-40 ... 176 °F)  
 cable, flexing: -20 ... 80 °C (-4 ... 176 °F)

Pollution Degree 3

**Mechanical specifications**

Contact elements spring-loaded contact socket  
 Pin diameter 1 mm  
 Degree of protection IP67  
 Material  
 Contacts CuSn / Au  
 Contact surface Au  
 Body TPU, black  
 Cable PUR  
 Slotted nut Diecast zinc  
 Sleeve connector Diecast zinc  
 Core insulation PP  
 Cable fine-strand, flexible  
 Sheath diameter Ø 4.3 mm  
 Bending radius > 15 x cable diameter, induced  
 > 8 x cable diameter, fixed  
 Color grey  
 Cores 3 x 0.25 mm<sup>2</sup>  
 Conductor construction 14 x 0.15 mm Ø  
 Length L 0.15 m  
 Flammability  
 Contact material 94 HB  
 Housing 94 V-2

**Electrical connection**

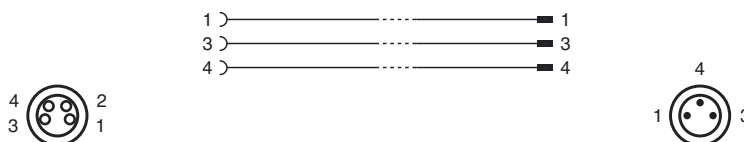

Release date: 2015-02-19 13:00 Date of issue: 2015-02-19 275666\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
 www.pepperl-fuchs.com

USA: +1 330 486 0001  
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
 fa-info@sg.pepperl-fuchs.com