

Features

- Power 58 W
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Ex d certified
- Multi voltage electronic ballast
- AC or DC
- Borosilicate glass overtube resistant to process chemicals
- Sturdy metallic housing

Dimensions (mm)

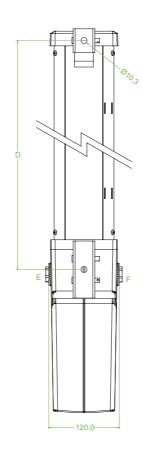

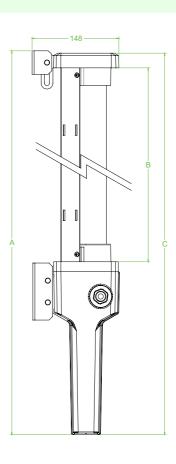

Te	chi	nica	al d	ata
----	-----	------	------	-----

Electrical specifications	
Operating voltage	198 264 V 50/60 Hz 176 280 V DC
Operating current	0.24 A
Terminal capacity	2.5 mm ² Connection block suitable for through wiring
Control gear	high frequency electronic ballast complying with all European standards relating to safety, operatio and EMC (Immunity)
Power factor	0.98
Fitting type	Ceiling light fitting
Lamps	T8 bi-pin fluorescent tube , not included with delivery
Number of lamps	1
Length	1500 mm (5 ft)
Power	58 W
EMC in accordance with	EN55015:2000
Conformity	
Protection degree	EN 60529

Co	nf	ormi	ity
_			

Protection degree

Ambient conditions

Ambient temperature

Mechanical specifications

Cover fixing

Cable entry

Protection degree

Number of cable entries

M8 stainless steel socket cap head screws

-20 ... 40 °C (-4 ... 104 °F) / T6 / T85°C -20 ... 55 °C (-4 ... 131 °F) / T5 / T100°C -20 ... 60 °C (-4 ... 140 °F) / T4 / T135°C

IP67 according to EN 60529

metric threaded

1 x M20 at position E fitted with Ex d sealing plug

1 x M20 at position F fitted with Ex d sealing plug

Material

435761_eng.xml
2012-08-30
Date of issue
2012-08-30 18:50
Release date

Cast parts	Light metal alloy
Lamp cover	Borosilicate glass
Reflector	0.9 mm galvanised mild steel
Finish	cast parts: epoxy powder coated, RAL7032 reflector: epoxy powder coated, white
Seal	nitrile O-ring
Mass	approx. 8 kg
Dimensions	
Α	1820 mm
В	1497 mm
С	1816 mm
D	1557 mm
Mounting	2 x stainless steel removable mounting brackets
Grounding	Internal connection
Data for application in connection with Exareas	
EC-Type Examination Certificate	SIRA 00 ATEX 1107X
Group, category, type of protection, temperature class	(EX) II 2 GD Ex d IIC T* Gb, Ex tb IIIC T** °C Db
International approvals	
IECEx approval	IECEx SIR 10.0077X
GOST-R approval	GOST-R B01007
General information	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.