




### Features

- Coil voltage 415V
- Cast Aluminium
- 210 mm x 185 mm x 156 mm
- Suitable for Ex e motors
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22

### Dimensions (mm)

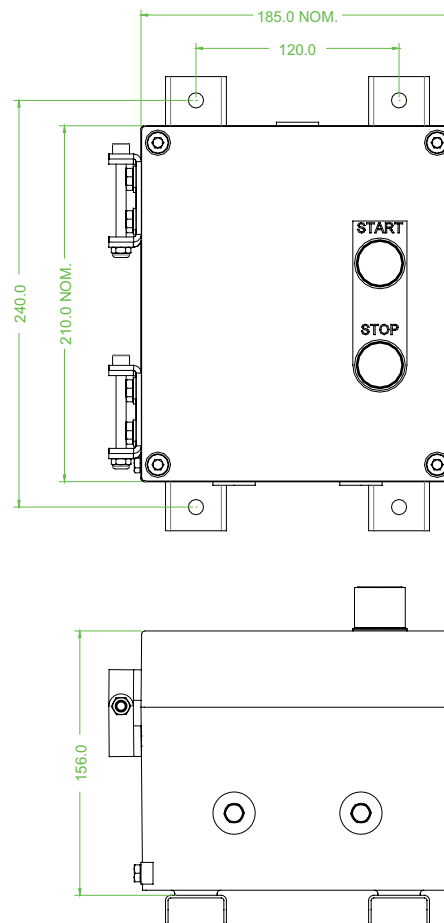

### Technical data

#### Electrical specifications

Contactor rating	
Power	15 kW
Current	32 A (AC3)
Coil Voltage	415 V
Terminal capacity	7 x 1.5-16mm <sup>2</sup> (1 x ground terminal)
Overload relay	24 ... 32 A
Phases	3
Function	direct online starter

#### Mechanical specifications

Height	210 mm
Width	185 mm
Depth	156 mm
Cover fixing	M8 stainless steel socket cap head screws
Fastener grade	A2-70
Protection degree	IP66
Cable entry	metric threaded
Number of cable entries	1 x M20 in face A 2 x M20 in face B all entries are fitted with Ex d sealing plugs
Material	
Enclosure	cast aluminium
Finish	painted black
Seal	one piece closed cell neoprene
Mass	approx. 8 kg
Mounting	2 x fabricated stainless steel mounting straps
Grounding	internal & external brass grounding terminals on base and lid

#### Ambient conditions

