




Features

- Coil voltage 415V
- Cast Aluminium
- 335 mm x 310 mm x 205 mm
- Suitable for Ex e motors
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22

Dimensions (mm)

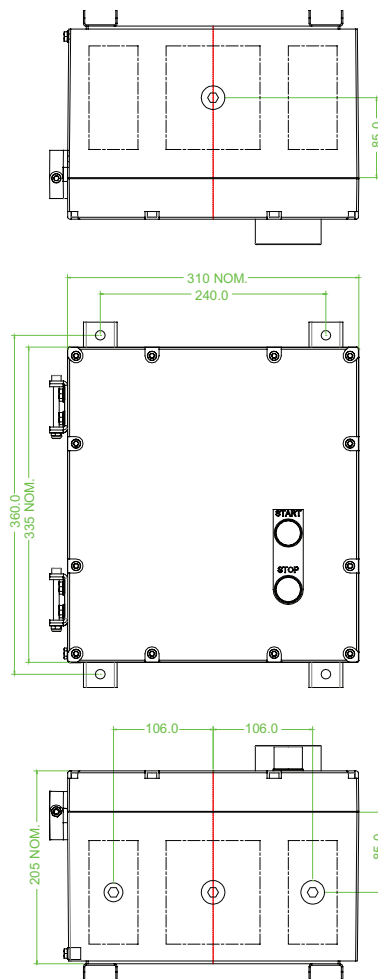

Technical data

Electrical specifications

Contactor rating	
Power	18.5 kW
Current	40 A (AC3)
Coil Voltage	415 V
Terminal capacity	8 x 1.5 - 16mm ² (2 x ground terminals) 6 x 0.5 - 4mm ² (2 x ground terminals)
Overload relay	24 ... 40 A
Phases	3
Function	direct online starter

Mechanical specifications

Height	335 mm NOM.
Width	310 mm NOM.
Depth	205 mm NOM.
Enclosure cover	hinged non-detachable
Cover fixing	M8 stainless steel socket cap head screws
Fastener grade	A2-70
Protection degree	IP66
Cable entry	metric threaded
Number of cable entries	1 x M25 in face A 2 x M25 in face B 1 x M20 in face B all entries are fitted with Ex d sealing plugs
Material	
Enclosure	cast aluminium
Finish	painted black
Seal	one piece closed cell neoprene
Mass	approx. 19 kg

