




### Features

- Coil voltage 415V
- Cast Iron
- 560 mm x 560 mm x 266 mm
- Suitable for Ex e motors
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22

### Dimensions (mm)

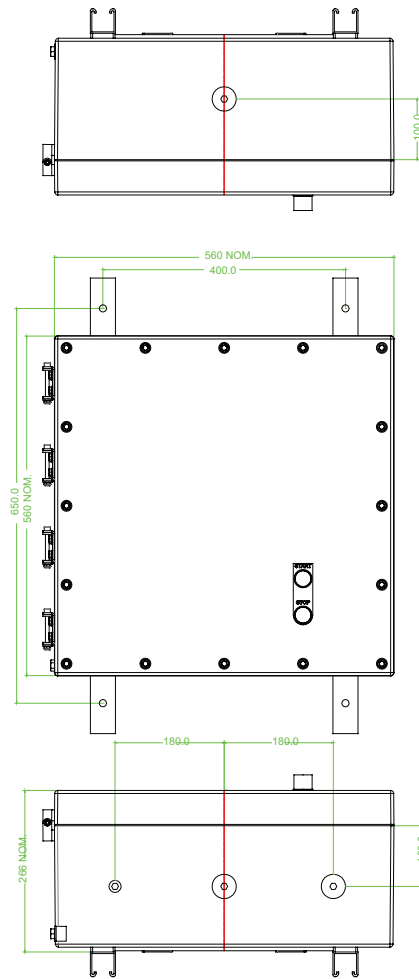

### Technical data

#### Electrical specifications

Contactor rating	
Power	75 kW
Current	150 A (AC3)
Coil Voltage	415 V
Terminal capacity	8 x 10 - 70mm <sup>2</sup> (2 x ground terminals) 6 x 0.5 - 4mm <sup>2</sup> (2 x ground terminals)
Overload relay	120 ... 142 A
Phases	3
Function	direct online starter

#### Mechanical specifications

Height	560 mm NOM.
Width	560 mm NOM.
Depth	266 mm NOM.
Enclosure cover	hinged non-detachable
Cover fixing	M10 stainless steel socket cap head screws
Fastener grade	A2-70
Protection degree	IP66
Cable entry	metric threaded
Number of cable entries	1 x M40 in face A 2 x M40 in face B 1 x M20 in face B all entries are fitted with Ex d sealing plugs
Material	
Enclosure	cast iron
Finish	painted black
Seal	by grease
Mass	approx. 172 kg

