




Features

- Coil voltage 415V
- Cast Aluminium
- 560 mm x 560 mm x 266 mm
- Suitable for Ex e motors
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22

Dimensions (mm)

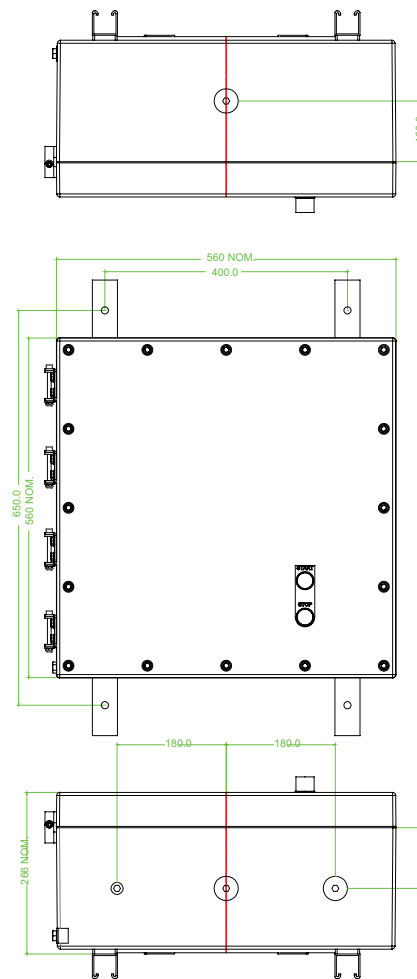

Technical data

Electrical specifications

Contactor rating	
Power	55 kW
Current	115 A (AC3)
Coil Voltage	415 V
Terminal capacity	8 x 10 - 50mm ² (2 x ground terminals) 6 x 0.5 - 4mm ² (2 x ground terminals)
Overload relay	95 ... 125 A
Phases	3
Function	direct online starter

Mechanical specifications

Height	560 mm NOM.
Width	560 mm NOM.
Depth	266 mm NOM.
Enclosure cover	hinged non-detachable
Cover fixing	M10 stainless steel socket cap head screws
Fastener grade	A2-70
Protection degree	IP66
Cable entry	metric threaded
Number of cable entries	1 x M32 in face A 2 x M32 in face B 1 x M20 in face B all entries are fitted with Ex d sealing plugs
Material	
Enclosure	cast aluminium
Finish	painted black
Seal	by grease
Mass	approx. 72 kg

