




Features

- Cast Aluminium
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Threaded cable entries
- Padlockable switch

Dimensions (mm)

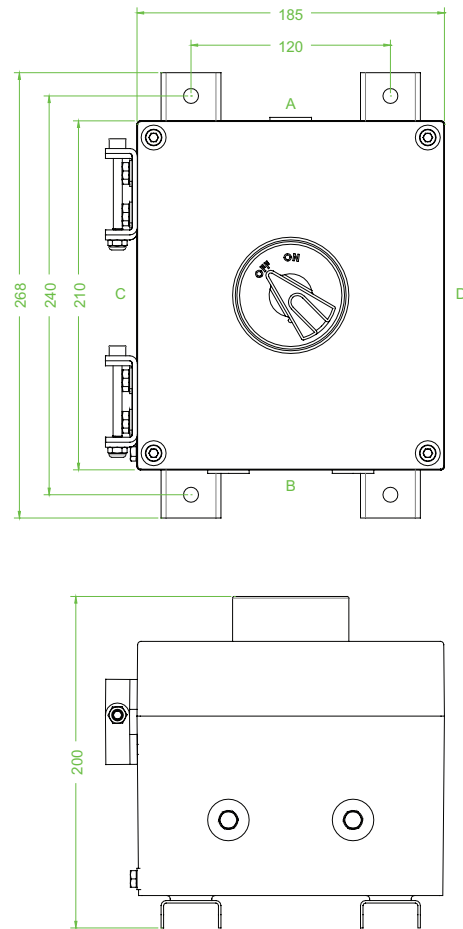

Technical data

Electrical specifications

Operating voltage	690 V
Operating current	100 A (AC21A)
Power	37 kW (AC23A) 30 kW (AC3)

Terminal capacity 50 mm²

Function switch disconnector

Number of poles

4

Auxiliary contacts

2 x n/o early break

Lockable

in 'OFF' position

Labeling

OFF - ON

Mechanical specifications

Height 210 mm NOM.

Width 185 mm NOM.

Depth 200 mm NOM.

Enclosure cover hinged non-detachable

Cover fixing M6 stainless steel socket cap head screws

Fastener grade

A2-70

Protection degree IP66

Cable entry metric threaded

Number of cable entries

1 x M25 in face A
2 x M25 in face B
all entries are fitted with Ex d sealing plugs

Material

Enclosure

cast aluminium

Finish

painted black

Seal

one piece closed cell neoprene

Mass

approx. 8 kg

Mounting	2 x fabricated stainless steel mounting straps
Grounding	internal & external brass grounding terminals on base and lid
Ambient conditions	
Ambient temperature	-20 ... 55 °C (-4 ... 131 °F)
Data for application in connection with Ex-areas	
EC-Type Examination Certificate	SIRA 03 ATEX 1215
Group, category, type of protection, temperature class	⊕ II 2 GD Ex d IIB T5 Gb, Ex tb IIIC T95°C (ta ... +55°C)
International approvals	
IECEX approval	IECEX SIR 08.0055
GOST-R approval	GOST-R B01008
Conformity	
Protection degree	EN 60529
Switch	switch disconnecter to IEC 60947-3
General information	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .