




Plastic fibre optics - thru beam

Threading M8

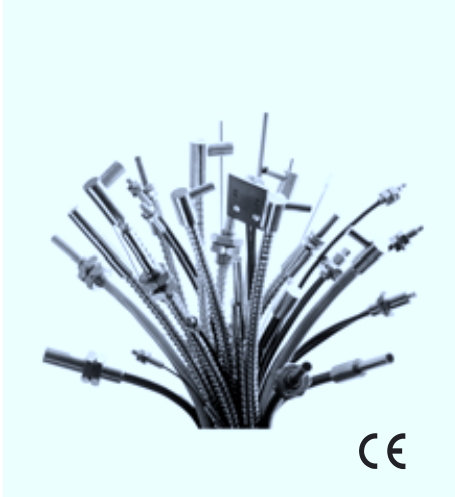

Technical data

<b>General specifications</b>		
Fibre optic length	<i>l</i>	1000 mm
Fibre optic diameter	<i>d</i>	2.2 mm
End piece		thread
Bend radius		min. 25 mm
Approvals		CE
<b>Standard conformity</b>		
Standards		EN 60947-5-2
<b>Ambient conditions</b>		
Ambient temperature		-30 ... 70 °C (243 ... 343 K)
<b>Mechanical specifications</b>		
Protection degree		IP65
<b>Material</b>		
Optical face		glass
Covering (Sheathing)		Black polyethylene
Core		plastic

Fibre optic amplifiers

Device series SU-series (without SU15-G)

Narrow light beam through glass lens

Thread M8

High detection ranges achievable

Dimensions

