



Technical data

General specifications

Sensor range	SU18: 4 mm SU18/35: 12 mm SU19: 4 mm
Fiber optic length	l 2000 mm , adjustable
Fiber optic diameter	d 1 mm
Adapter form	00
End piece	Cylindrical
Bending radius	min. 10 mm
Fiber configuration	Fv see dimensions
Angle of divergence	67 °
Accessories provided	Cutter for plastic fiber optics

Ambient conditions

Ambient temperature	-55 ... 70 °C (-67 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Material	
Optical face	plastic
Sheathing	PVC
Core	plastic
End piece	Stainless steel 1.4305 / AISI 303

Model Number

KLR-C02-1,0-2,0-K90
Plastic fiber optic - diffuse

Features

- Optimized for the detection of small parts

Series


Fiber optic amplifiers
Device series SU18 ; SU18/35 ; SU19

Description

Attention:
Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Dimensions

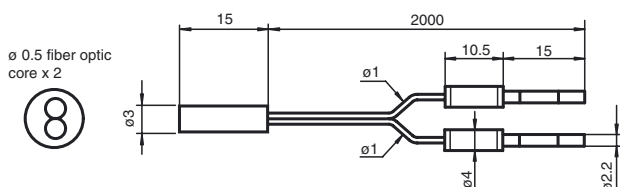

Release date: 2014-07-09 15:54 Date of issue: 2014-07-09 805863_eng.xml