



**Technical data**

**General specifications**

Sensor range		1 mm ... 8 mm
Fiber optic length	l	2000 mm , adjustable
Fiber optic diameter	d	1.3 mm
Adapter form		00
End piece		Rectangular type
Bending radius		min. 25 mm
Fiber configuration	Fv	see dimensions
Angle of divergence		67 °
Accessories provided		Cutter for plastic fiber optics

**Ambient conditions**

Ambient temperature		-55 ... 70 °C (-67 ... 158 °F)
---------------------	--	--------------------------------

**Mechanical specifications**

<b>Material</b>		
Optical face		plastic
Sheathing		PVC
Core		plastic
End piece		plastic

**Model Number**

**KLR-C02-1,3-2,0-K130**

Plastic fiber optic - diffuse

**Features**

- Crossing light beam
- Background interference suppression

**Series**

**Fiber optic amplifiers**

Device series SU18 ; SU18/35 ; SU19


**Description**

**Attention:**

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



**Dimensions**

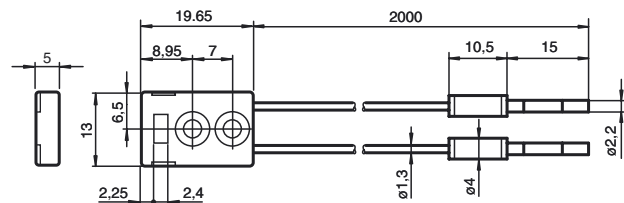

Release date: 2014-07-09 15:54 Date of issue: 2014-07-09 805886\_eng.xml