

Technical data

General specifications

Fiber optic length	l	2000 mm , adjustable
Fiber optic diameter	d	1.25 mm
Adapter form		00
End piece		Cylindrical
Bending radius		min. 40 mm
Fiber configuration	Fv	see dimensions
Angle of divergence		67 °
Accessories provided		Cutter for plastic fiber optics

Ambient conditions

Ambient temperature		-55 ... 70 °C (-67 ... 158 °F)
---------------------	--	--------------------------------

Mechanical specifications

Degree of protection		IP67
Material		
Optical face		plastic
Sheathing		PTFE
Core		plastic
End piece		PTFE

Model Number

KLR-C02-1,25-2,0-K147

Plastic fiber optic - diffuse

Features

- Level indication
- Chemical-resistant

Series

Fiber optic amplifiers

Device series SU18 ; SU18/35 ; SU19


Description

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Dimensions

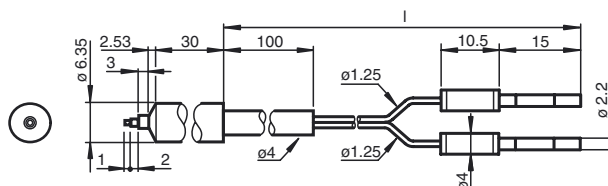

Release date: 2014-07-09 15:54 Date of issue: 2014-07-09 808305_eng.xml