



### Model Number


**V3-WR-YE5M-PUR**

Cable socket, M8, 3-pin, PUR cable

### Features

- Snap locking

### Dimensions

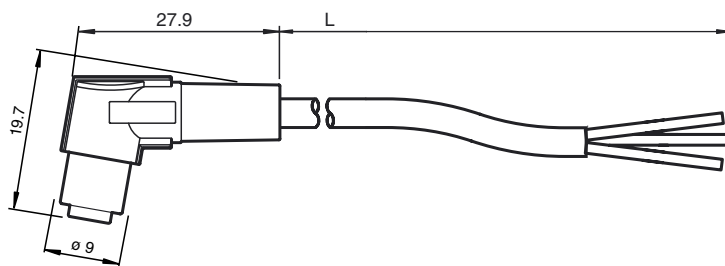

### Technical data

#### General specifications

Number of pins	3
Connection 1	female connector
Construction type 1	right angle
Connection 2	cable end

#### Electrical specifications

Operating voltage	$U_B$	max. 125 V DC
Test voltage		> 1500 V <sub>eff</sub> AC
Operating current		max. 4 A
Volume resistance		< 5 mΩ

#### Ambient conditions

Ambient temperature	-25 ... 80 °C (-13 ... 176 °F)
Pollution Degree	3

#### Mechanical specifications

Pin diameter	1 mm
Protection degree	IP67 / IP68 / IP69k
Material	
Contacts	CuSn
Contact surface	Ni/Au
Body	TPU , yellow
Cable	PUR
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	Ø 4.4 mm
Bending radius	10 x cable diameter
Color	yellow
Cores	3 x 0.25 mm <sup>2</sup>
Length	L 5 m
Flammability	
Contact material	94 V-2
Housing	94 V-2
Wire	VW-1 flame rating from UL
Note	M8 without thread

#### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

### Electrical connection



1	.....	BN
3	.....	BU
4	.....	BK