



### Model Number


**V1-G-YE10M-PUR-H/S**

Cable socket, M12, 4-pin, PVC cable

### Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Protection degree IP68/IP69K
- Suitable for 2-, 3- and 4-wire technology

### Dimensions

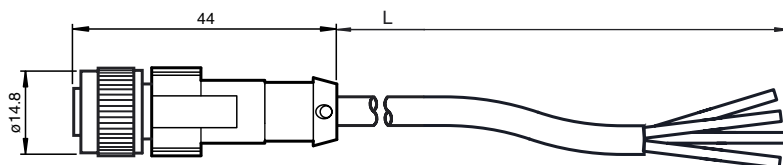

### Technical data

#### General specifications

Number of pins	4
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

#### Electrical specifications

Operating voltage	$U_B$	max. 300 V DC
Test voltage		> 1500 V <sub>eff</sub> AC
Operating current		max. 4 A
Volume resistance		< 5 mΩ


#### Ambient conditions

Ambient temperature	-40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

#### Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Protection degree	IP68 / IP69K
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU , yellow
Cable	irradiated PUR
Slotted nut	Diecast zinc
Core isolation	polyester
Cable	fine-strand, flexible
Sheath diameter	Ø 6.2 mm
Color	yellow
Cores	4 x 0.75 mm <sup>2</sup>
Conductor construction	24 x 0.2 mm
Length	L 10 m

### Electrical connection



1	.....	BN
2	.....	WH
3	.....	BU
4	.....	BK