



### Model Number


**V93-G-YE4M-STOOW**

Female cordset, 7/8", 3-pin, STOOW cable

### Features

- Thread 7/8"

### Dimensions

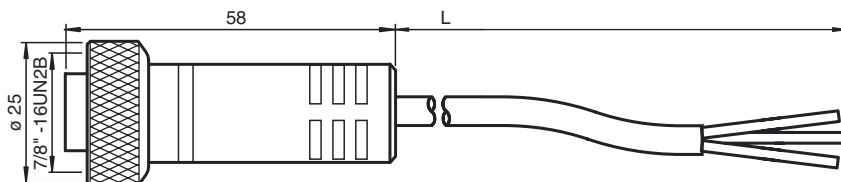

### Technical data

#### General specifications

Number of pins	3
Connection 1	socket
Construction type 1	straight
Threading 1	7/8"
Connection 2	cable end

#### Electrical specifications

Operating voltage	$U_B$	max. 600 V
Test voltage		1500 V
Operating current		13 A
Volume resistance		< 5 m $\Omega$

#### Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------


#### Mechanical specifications

Protection degree	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC
Slotted nut	clear anodized aluminum
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	$\varnothing$ 9.9 mm
Bending radius	10 x cable diameter
Color	yellow
Cores	3 x 1.5 mm <sup>2</sup> (16 AWG)
Length	L
Note	STOOW UL Standard

#### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

### Electrical connection



1	GN/YE
2	BK
3	WH