



Model Number


V94-G-YE2M-STOOW

Female cordset, 7/8", 4-pin, STOOW cable

Features

- Thread 7/8"

Dimensions

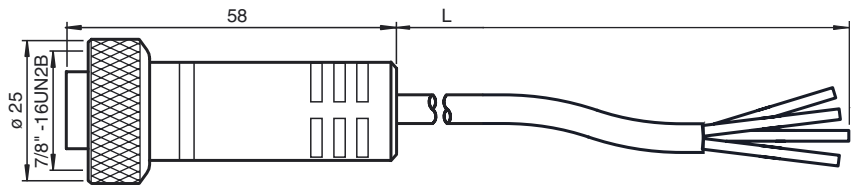

Technical data

General specifications

| | |
|---------------------|-----------|
| Number of pins | 4 |
| Connection 1 | socket |
| Construction type 1 | straight |
| Threading 1 | 7/8" |
| Connection 2 | cable end |

Electrical specifications

| | | |
|-------------------|-------|----------------|
| Operating voltage | U_B | max. 600 V |
| Test voltage | | 1500 V |
| Operating current | | 10 A |
| Volume resistance | | < 5 m Ω |

Ambient conditions

| | |
|---------------------|---------------------------------|
| Ambient temperature | -40 ... 105 °C (-40 ... 221 °F) |
|---------------------|---------------------------------|

Mechanical specifications

| | |
|-------------------|----------------------------------|
| Protection degree | IP67 |
| Material | |
| Contacts | Cu alloy gold plated |
| Body | PVC, yellow |
| Cable | PVC |
| Slotted nut | clear anodized aluminum |
| Core insulation | PVC |
| Cable | fine-strand, flexible |
| Sheath diameter | Ø 10.7 mm |
| Bending radius | 10 x cable diameter |
| Color | yellow |
| Cores | 4 x 1.5 mm ² (16 AWG) |
| Length | L |
| Note | STOOW UL Standard |

Approvals and certificates

| | |
|-------------|-------------------------------|
| UL approval | cULus Listed, General Purpose |
|-------------|-------------------------------|

Electrical connection

