


**Dimensions**

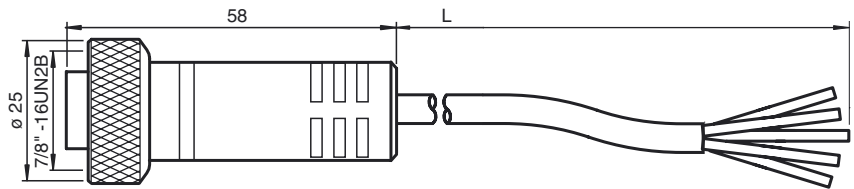

**Model Number**

**V95-G-YE5M-PVC-22**

Female connector, 7/8" - 16 UNF, 5-pin, PVC cable

**Features**

- Thread 7/8"
- Immunity to vibration

**Technical data**

**General specifications**

Number of pins	5
Connection 1	female connector
Construction type 1	straight
Threading 1	7/8"
Connection 2	cable end
Threading 2	7/8"

**Electrical specifications**

Operating voltage	$U_B$	max. 300 V
Operating current		max. 4 A


**Ambient conditions**

Ambient temperature	-25 ... 105 °C (-13 ... 221 °F)
Pollution Degree	3

**Mechanical specifications**

Protection degree	IP68	
Material		
Contacts	gold plated copper alloy	
Body	PVC	
Cable	PVC	
Slotted nut	anodized aluminium	
Cable	fine-strand, flexible	
Sheath diameter	Ø 5.7 mm	
Color	yellow	
Cores	5 x 0.34 mm <sup>2</sup>	
Length	L	5 m

**Electrical connection**

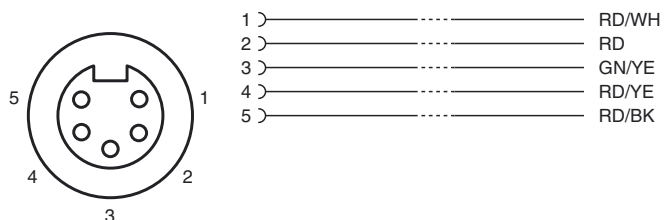

Release date: 2011-02-07 19:24 Date of issue: 2011-02-07 913067\_ENG.xml

Subject to modifications without notice

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411  
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs  
Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com